

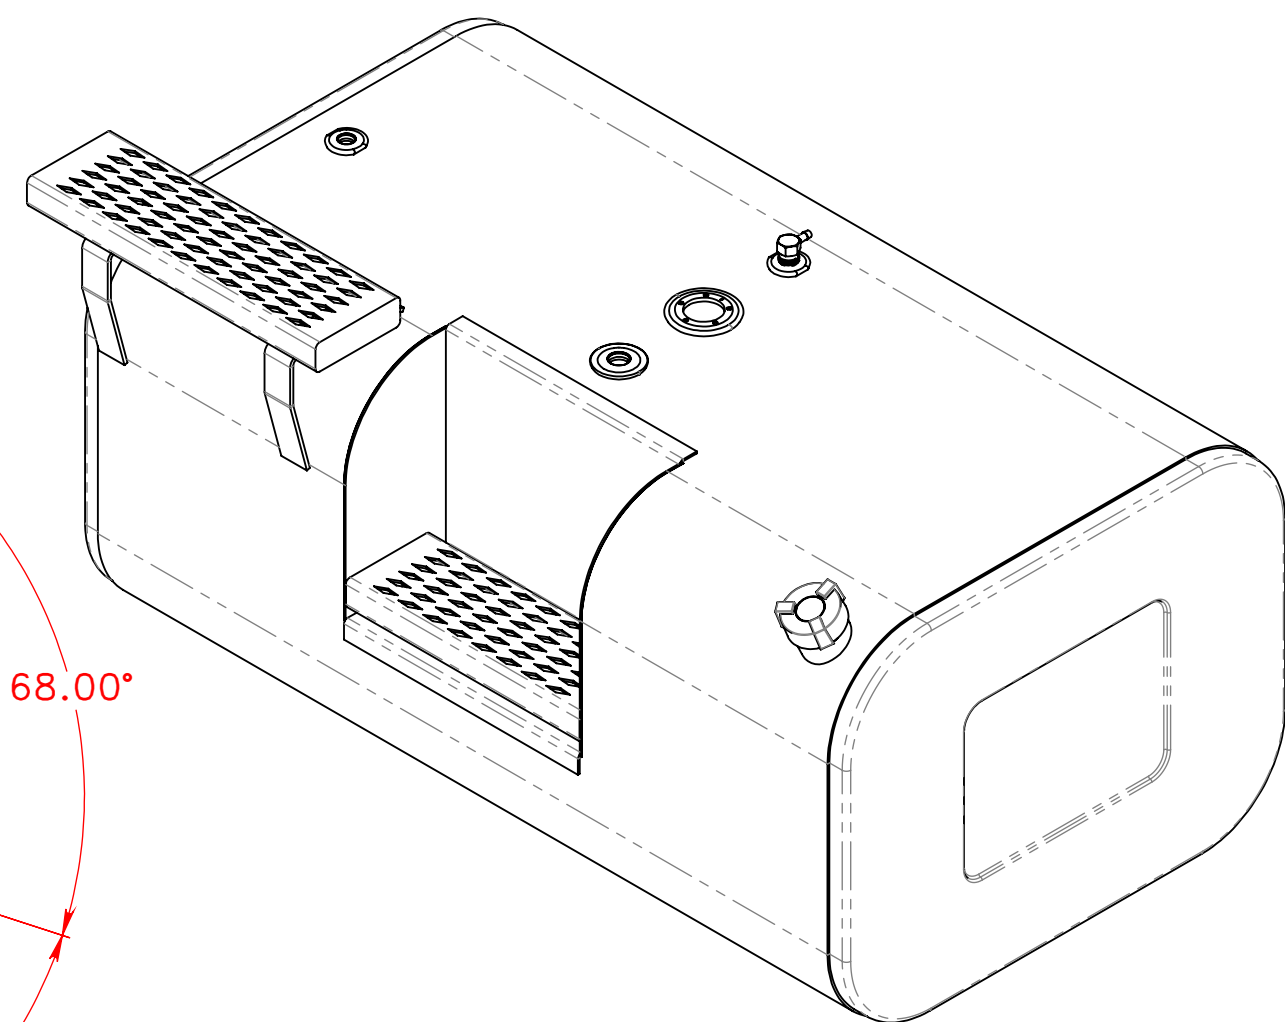


Diagram of the front view of the device. Callouts include:

- 8 (Top right corner)
- 4 (Top right corner)
- R5.00 (Bottom left corner)
- 7 (Bottom center)
- 4 (Bottom center)

NOTES FOR STANDARD CONSTRUCTION:
 ...MEETS FMCSA REQUIREMENTS.
 ...PRESSURE TESTED @ 5psi
 ...INTERIOR FREE OF FOREIGN MATTER.
 ...FILLER CAP, DRAIN PLUG & VENT PROVIDED.
 ...ALUMINUM CONSTRUCTION:
 5052-H32 ALUMINUM, BRIGHT FINISH
 HEADS ARE 0.100" & SHELL IS 0.125"
 ...ALL OPENINGS PLUGGED PRIOR TO SHIPPING

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PROPOWER MFG. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PROPOWER MFG. INC. IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED:	DRAWN	NAME	A.B	03/19/14	PROPOWER MFG. INC. WINDSOR, ONTARIO, CANADA Ph: 519-737-1197 Fax: 519-737-1918 TOLL FREE 1-877-741-2365 Web: metaltanks.com									
	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± 1/16 ANGULAR: MACH ± 1° BEND ± 1° TWO PLACE DECIMAL ± .06 THREE PLACE DECIMAL ± .031	CHECKED				TITLE: IN-L20-26RFA2S45 90 US GROSS GALLONS 86 USEBLE GALLONS DIESEL FUEL TANK	SIZE	DWG. NO.	REV						
		ENG APPR.													
		MFG APPR.													
		Q.A.													
INTERPRET GEOMETRIC TOLERANCING PER:	COMMENTS:					C				16527	SCALE: 1:8	WEIGHT: 72 lbs	SHEET 1 OF 2		
MATERIAL							ALUMINUM								
FINISH															
DO NOT SCALE DRAWING	THIRD ANGLE PROJECTION														