



8 7 6 5 4 3 2 1

D

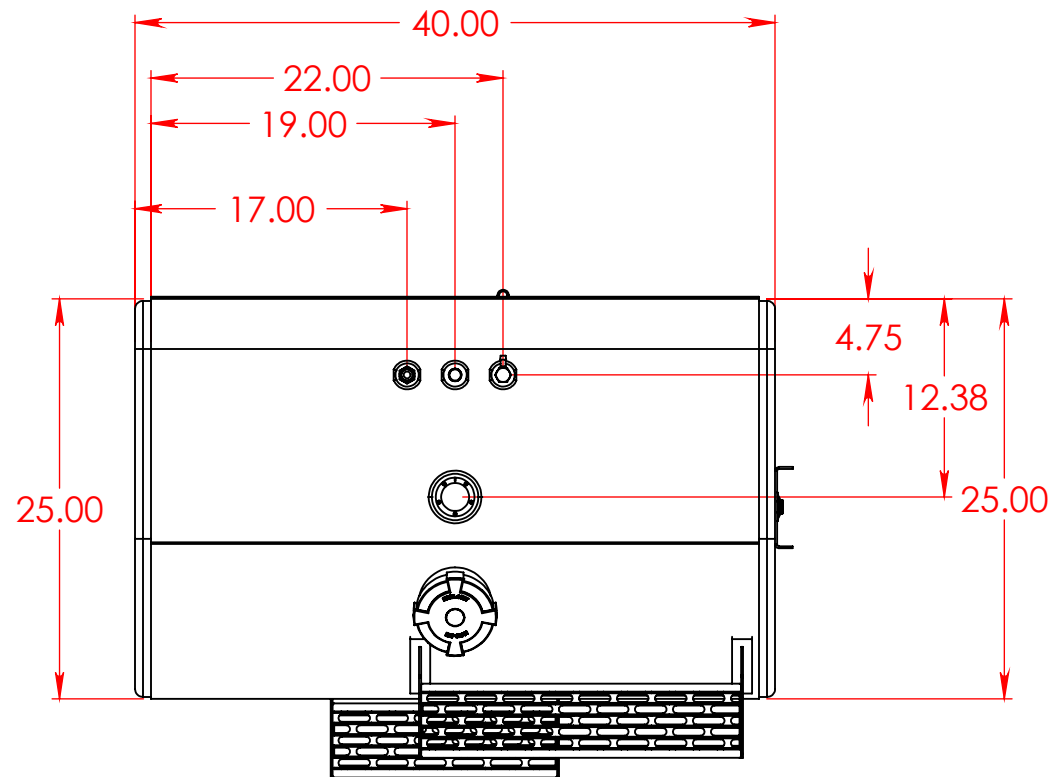

NOTES FOR STANDARD CONSTRUCTION:
...MEETS FMCSA REQUIREMENTS.
...PRESSURE TESTED @ 5psi.
...INTERIOR FREE OF FOREIGN MATTER.
...FILLER CAP, DRAIN & VENT PROVIDED.
...REPLACEABLE DRAW/RETURN TUBES.
...FULL BAFFLE(S) WHERE SHOWN.
...ALUMINUM CONSTRUCTION:
5052-H32 ALUMINUM, BRIGHT FINISH
HEADS ARE .100" & SHELL IS .125".
...ALL OPENINGS PLUGGED PRIOR TO SHIPPING


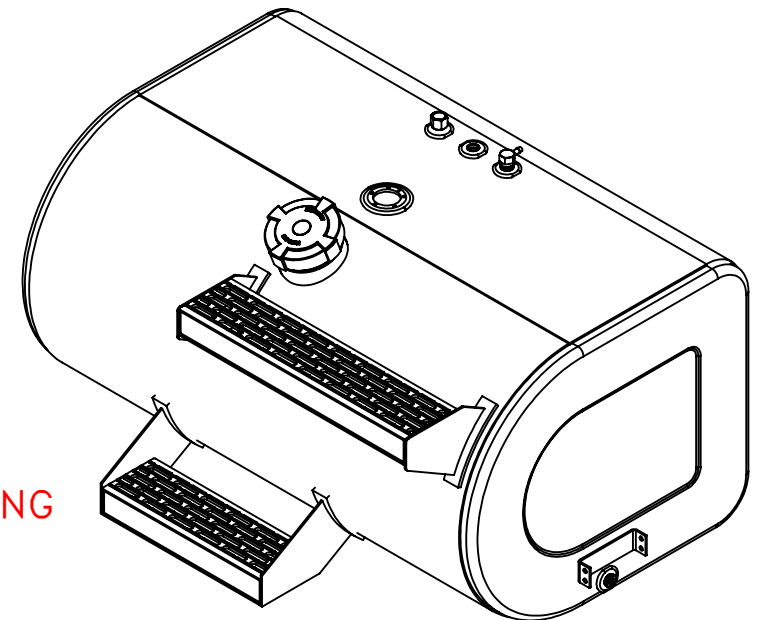


D

C

C

B

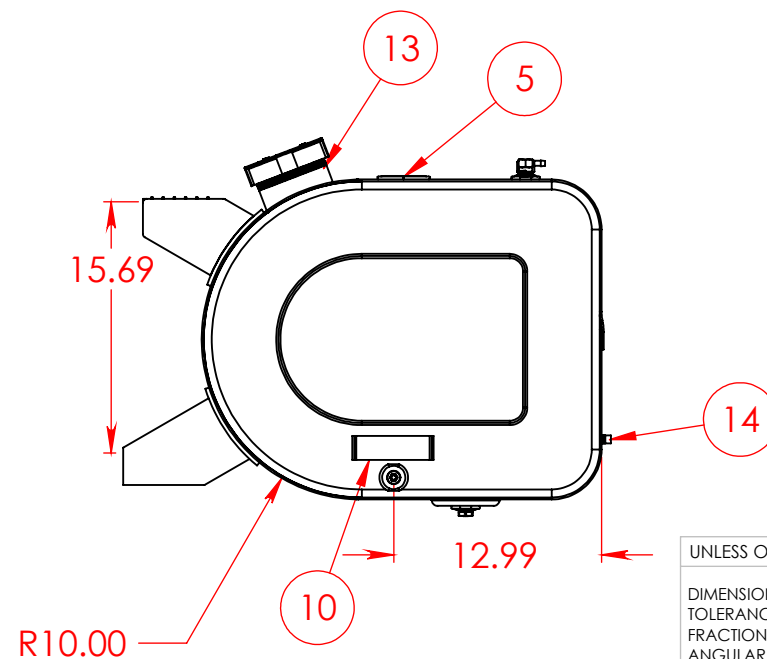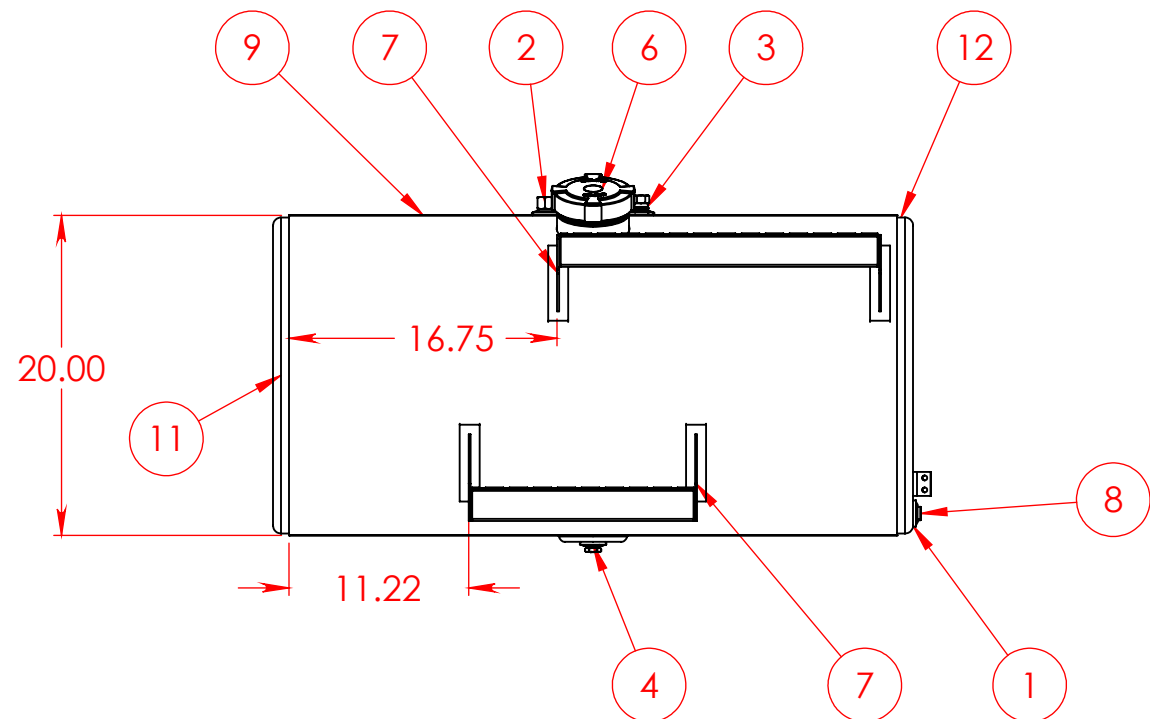


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	260-0005	1/2" FNPT Aluminum weld flange	5
2	490-0020-Z	1/2" NPT Down Tube	1
3	454-0937	1/2" NPT Ball Check Vent	1
4	458-0100	1/2" NPT Ball Check Drain Plug	1
5	265-0010	Aluminum Float Riser	1
6	452-1015	4" Pressure Relief Fuel Cap	1
7	219-0001	Step	2
8	368-0020	1/2" NPT Hex Brass Plug	1
9	116-0001	1/8" Auminum Sheet	1
10	266-0002	CrossoverSupporBkt	1
11	160-0040	20x25 D Head	1
12	160-0067	20x25 D Head With Crossover	1
13	316-0024	4" Filler Neck	1
14	266-0005	BktVentHoseClip	1
15	490-3001	Down Tube Support	1

B

A

A

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
PROPOWER MFG. INC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
PROPOWER MFG. INC. IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	PROPOWER MFG. INC. WINDSOR, ONTARIO, CANADA Ph; 519-737-1197 Fax; 519-737-1918 TOLL FREE 1-877-741-2365 Web; metaltanks.com			
DIMENSIONS ARE IN INCHES		DRAWN	A.B				07/17/08
TOLERANCES:		CHECKED					
FRACTIONAL ± 1/16		ENG APPR.					
ANGULAR: MACH ± 1° BEND ± 1°		MFG APPR.					
TWO PLACE DECIMAL ± .06					TITLE: FD-R20-25DFA2S40 78 US GROSS GALLONS 75 USEBLE GALLONS DIESEL FUEL CELL		
THREE PLACE DECIMAL ± .031							
INTERPRET GEOMETRIC TOLERANCING PER:		Q.A.					
MATERIAL		COMMENTS:					
FINISH		THIRD ANGLE PROJECTION					
DO NOT SCALE DRAWING					SIZE DWG. NO. REV		
					B 8658		
					SCALE: 1:12 WEIGHT: SHEET 1 OF 2		