


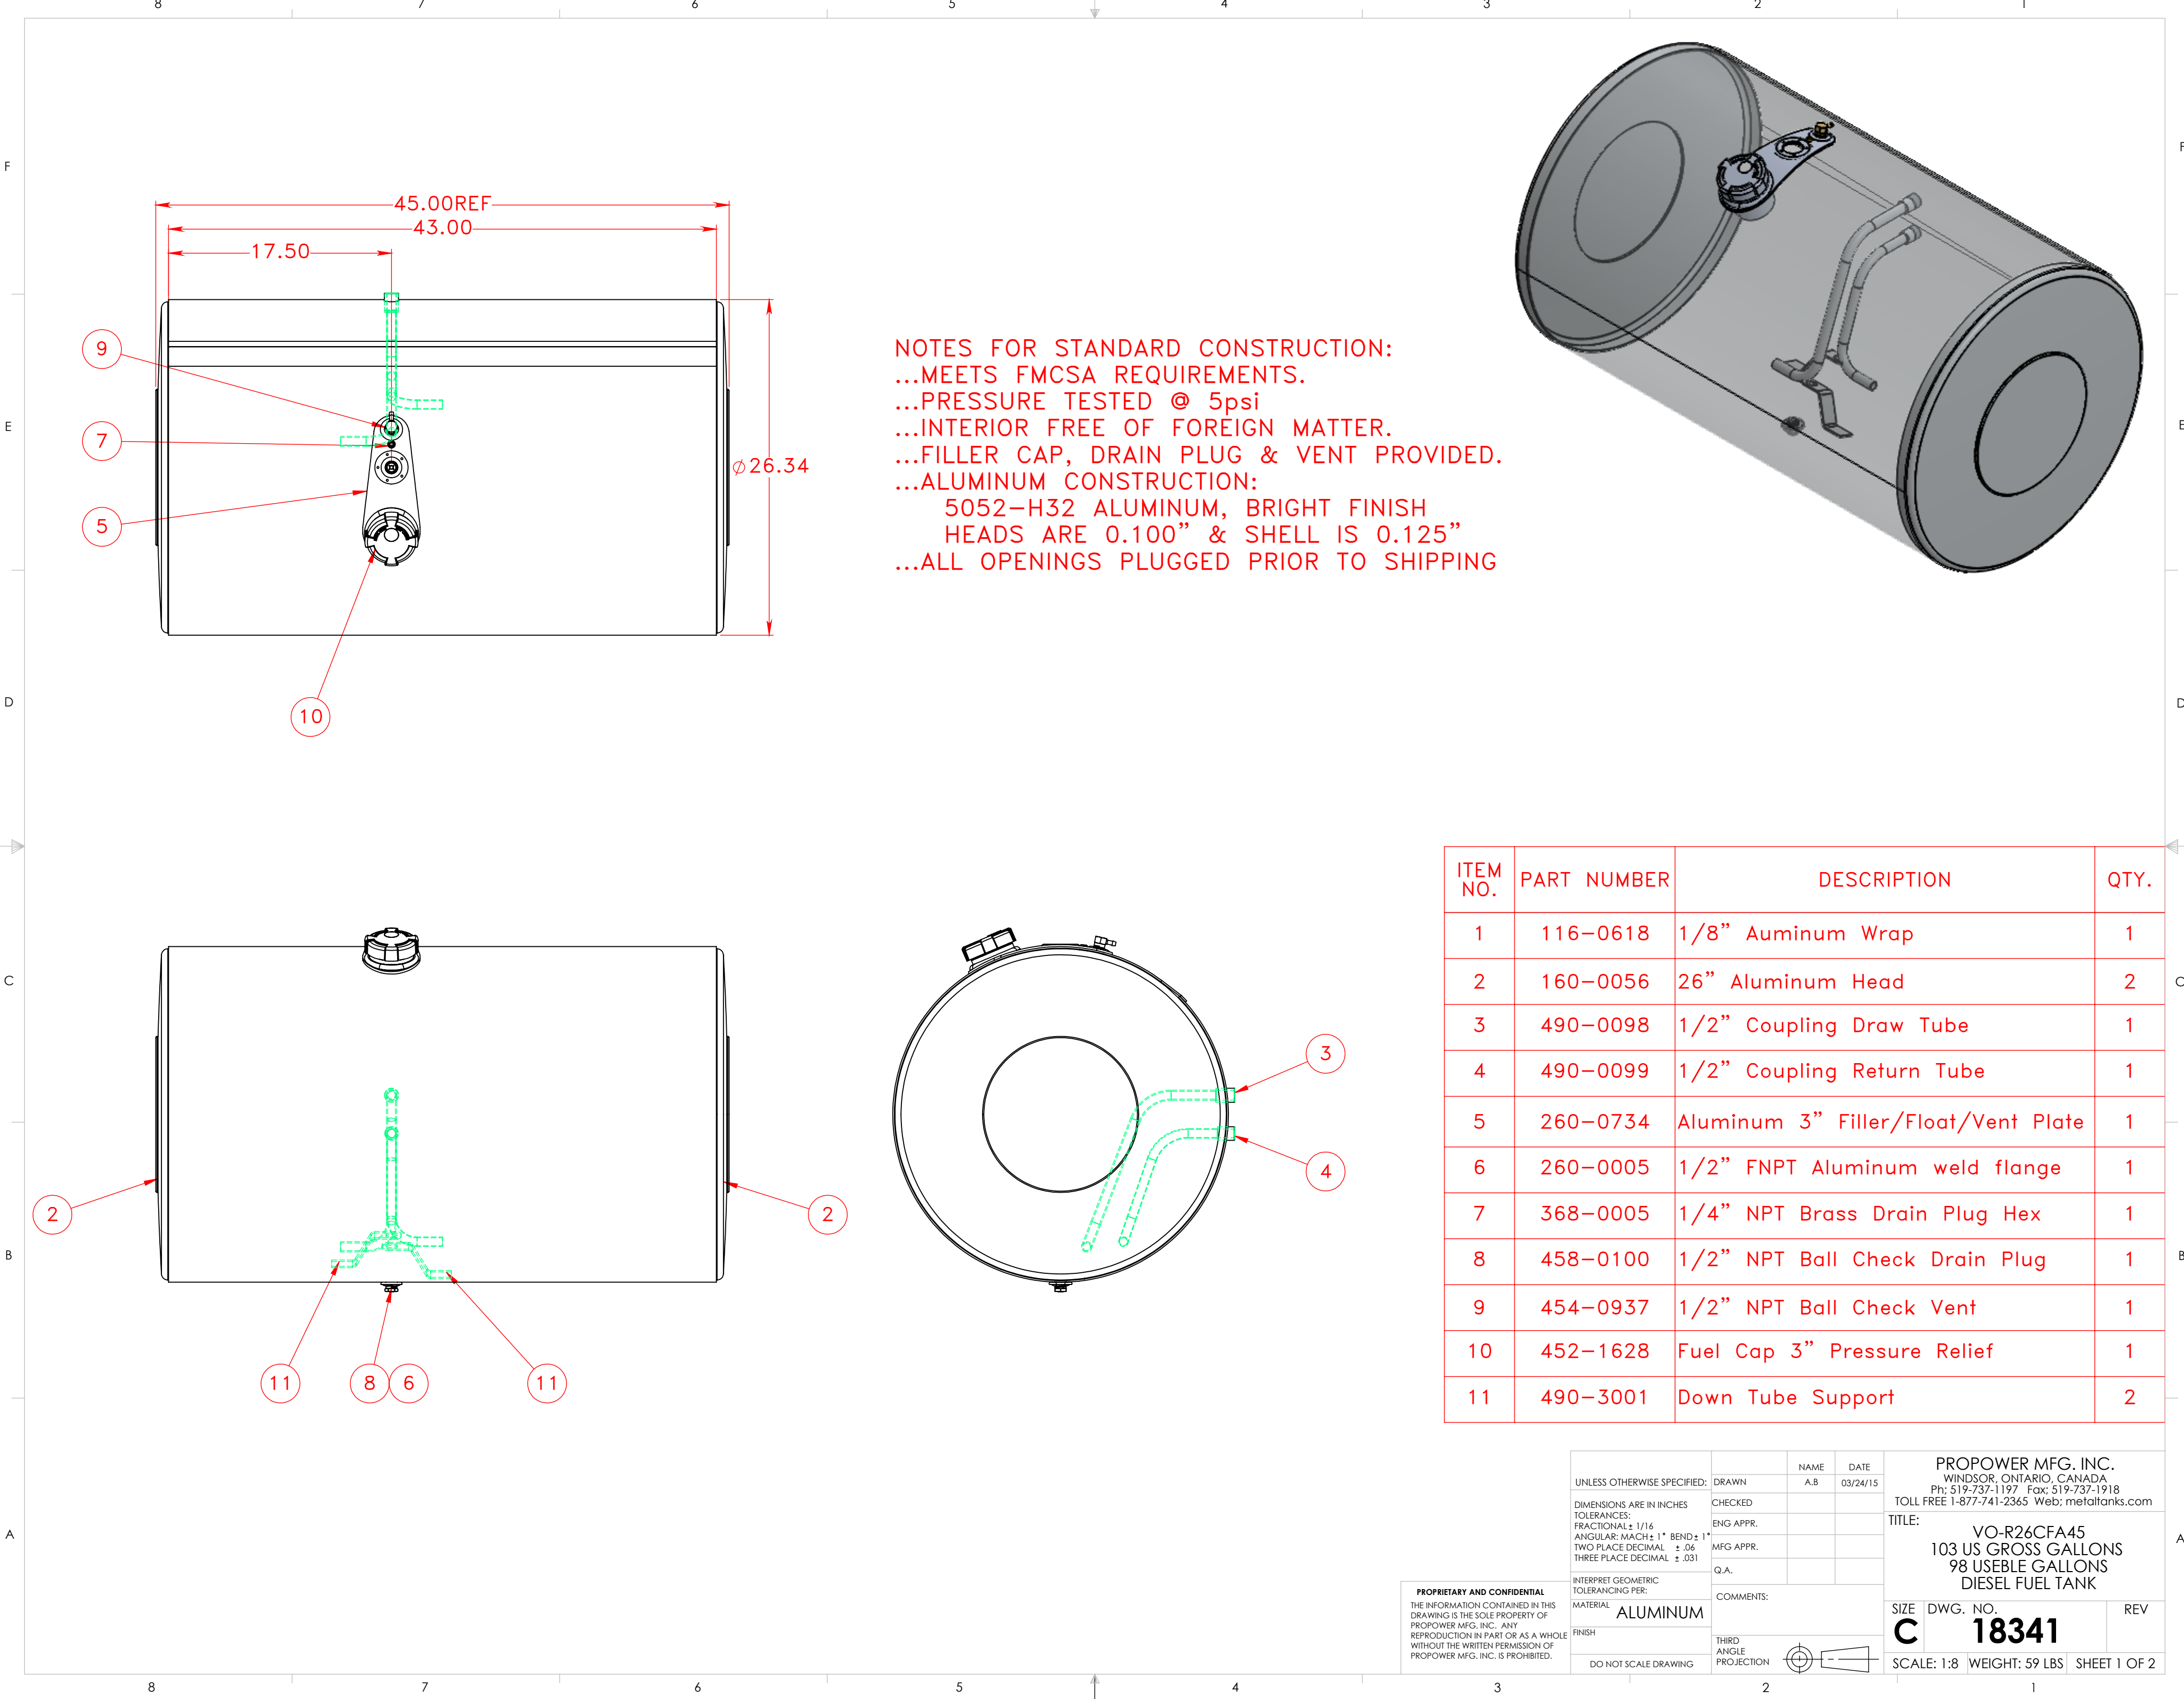

NOTES FOR STANDARD CONSTRUCTION:
...MEETS FMCSA REQUIREMENTS.
...PRESSURE TESTED @ 5psi
...INTERIOR FREE OF FOREIGN MATTER.
...FILLER CAP, DRAIN PLUG & VENT PROVIDED.
...ALUMINUM CONSTRUCTION:
5052-H32 ALUMINUM, BRIGHT FINISH
HEADS ARE 0.100" & SHELL IS 0.125"
...ALL OPENINGS PLUGGED PRIOR TO SHIPPING

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	116-0618	1/8" Auminum Wrap	1
2	160-0056	26" Aluminum Head	2
3	490-0098	1/2" Coupling Draw Tube	1
4	490-0099	1/2" Coupling Return Tube	1
5	260-0734	Aluminum 3" Filler/Float/Vent Plate	1
6	260-0005	1/2" FNPT Aluminum weld flange	1
7	368-0005	1/4" NPT Brass Drain Plug Hex	1
8	458-0100	1/2" NPT Ball Check Drain Plug	1
9	454-0937	1/2" NPT Ball Check Vent	1
10	452-1628	Fuel Cap 3" Pressure Relief	1
11	490-3001	Down Tube Support	2

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PROPOWER MFG. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PROPOWER MFG. INC. IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED:	DRAWN	NAME A.B	DATE 03/24/15	PROPOWER MFG. INC. WINDSOR, ONTARIO, CANADA Ph: 519-737-1197 Fax: 519-737-1918 TOLL FREE 1-877-741-2365 Web: metaltanks.com	
	DIMENSIONS ARE IN INCHES	CHECKED				TITLE: VO-R26CFA45 103 US GROSS GALLONS 98 USEBLE GALLONS DIESEL FUEL TANK
	TOLERANCES:	ENG APPR.				
	FRACTIONAL: ± 1/16	MFG APPR.				
	ANGULAR: MACH ± 1° BEND ± 1°					
	TWO PLACE DECIMAL ± .06					
	THREE PLACE DECIMAL ± .031					
	INTERPRET GEOMETRIC TOLERANCING PER:					
	MATERIAL	ALUMINUM				
	FINISH					
DO NOT SCALE DRAWING						