


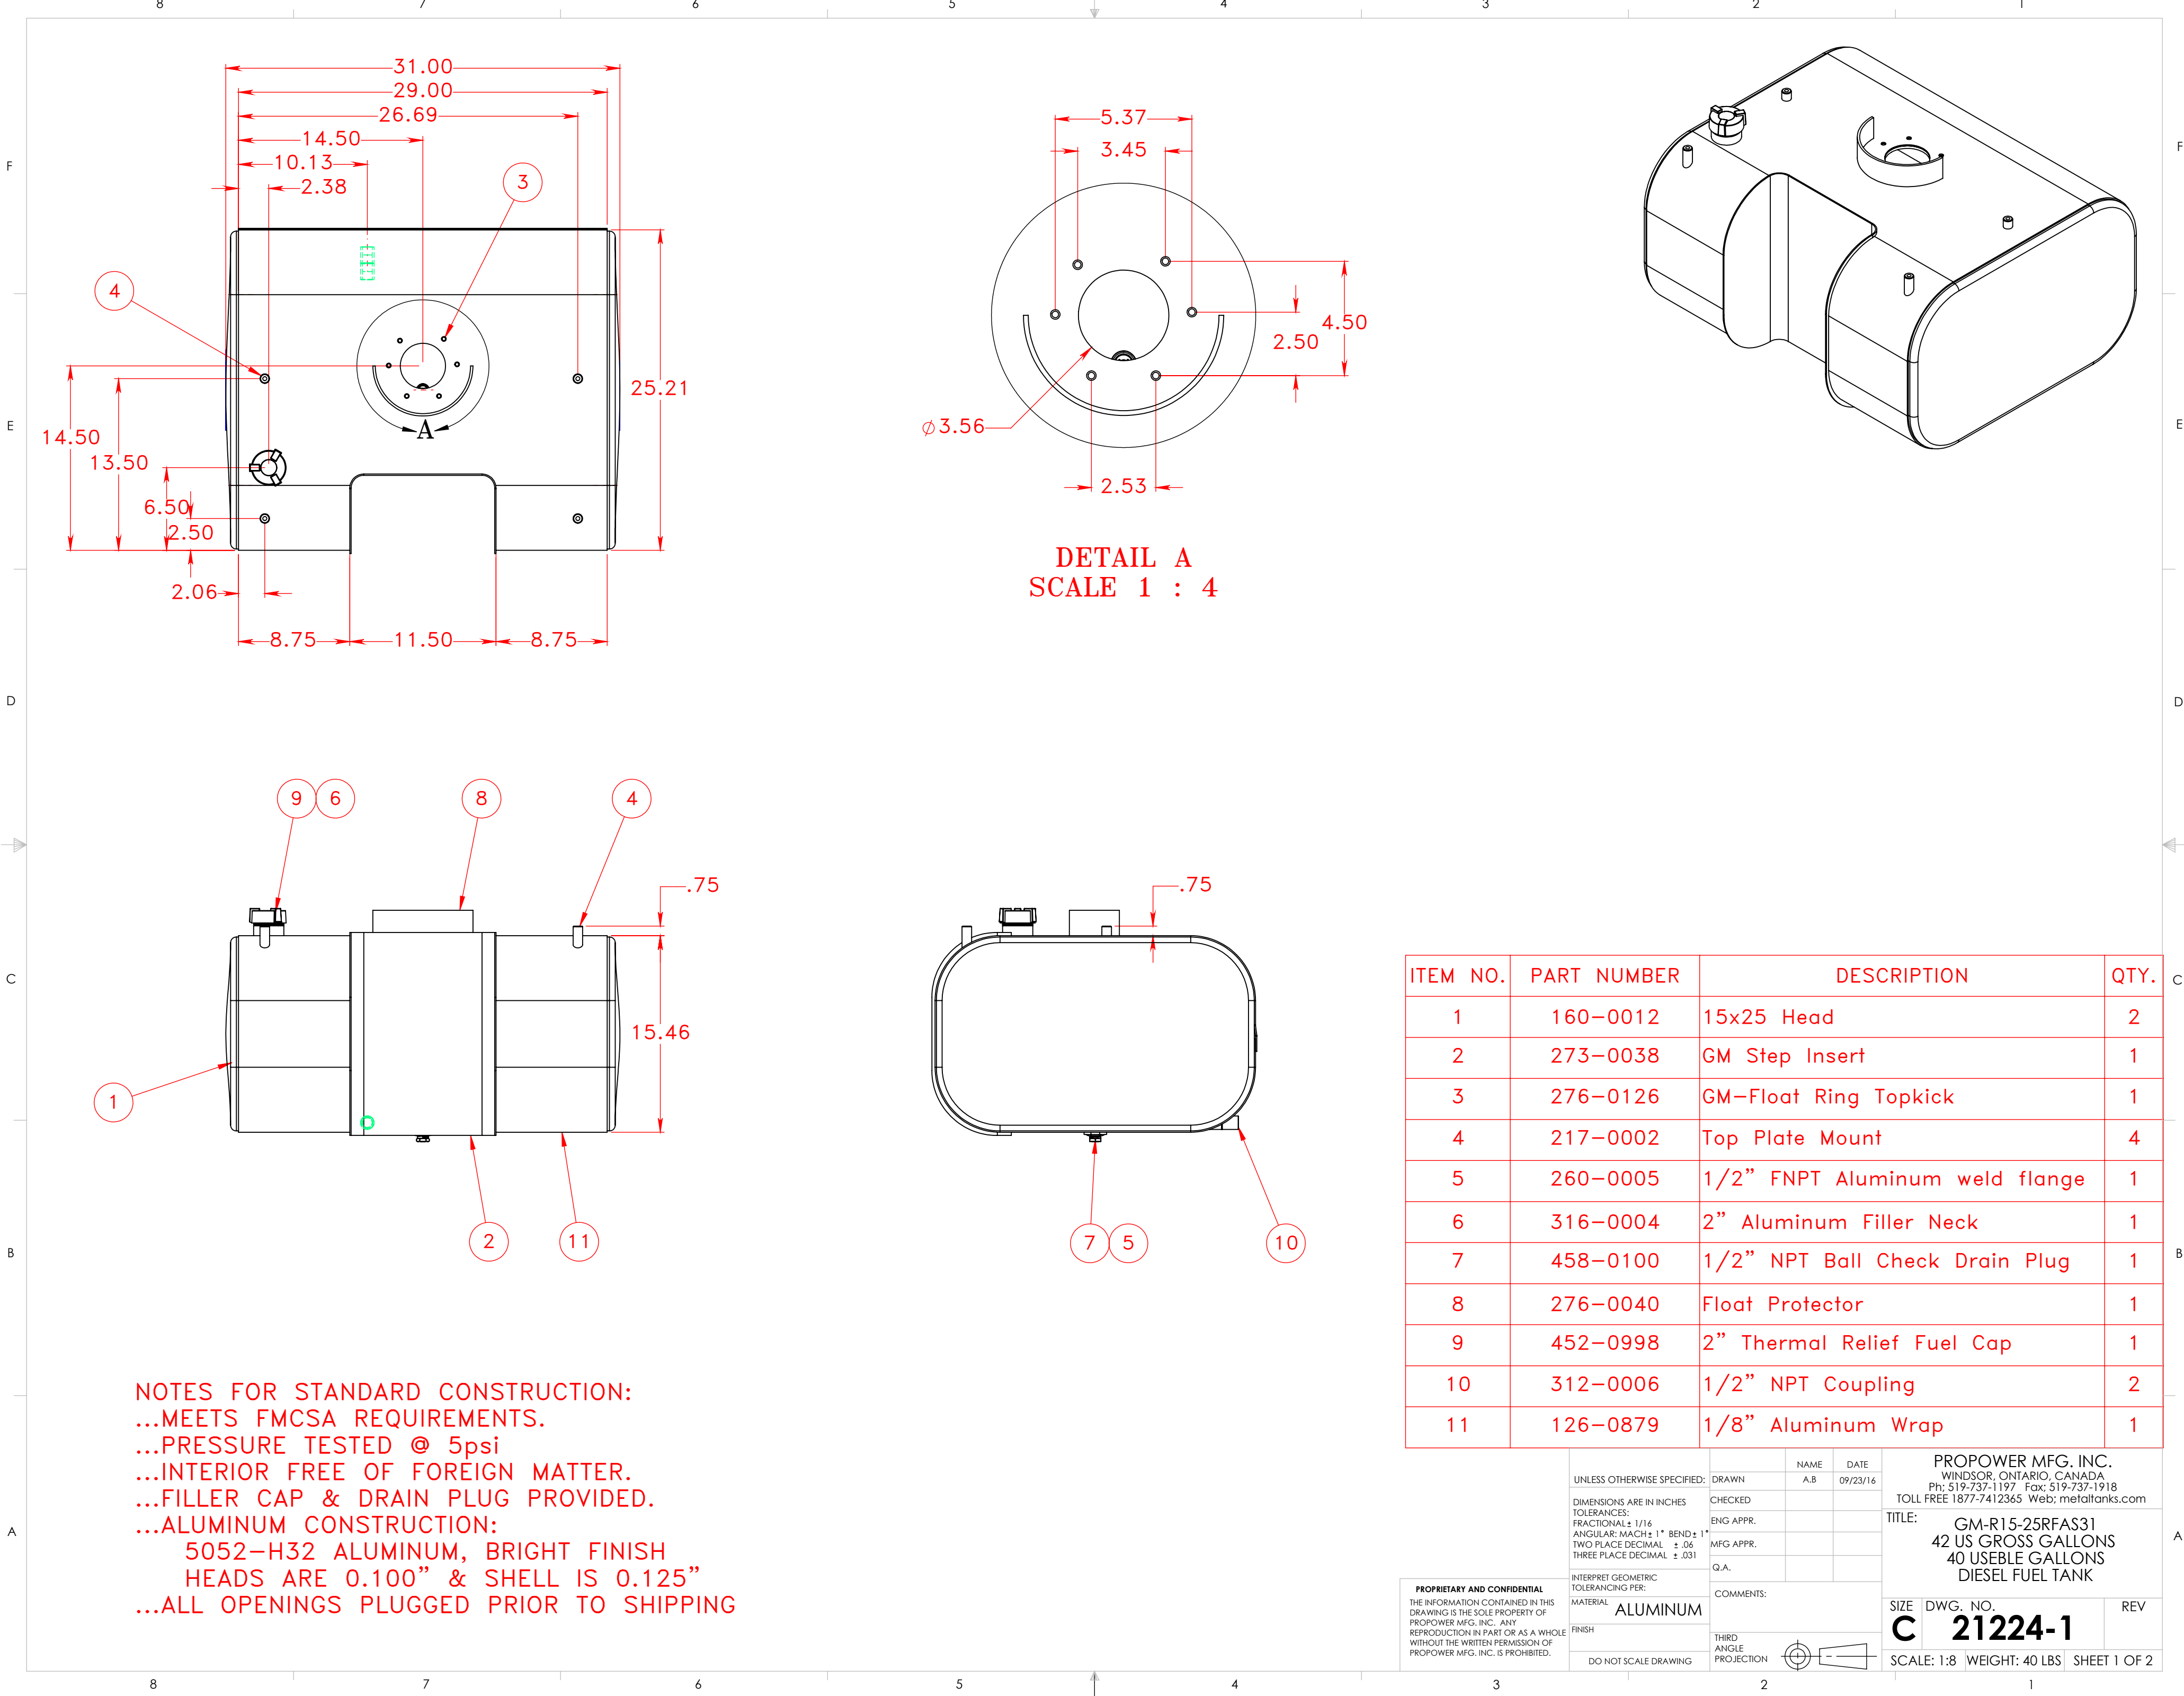

NOTES FOR STANDARD CONSTRUCTION:
...MEETS FMCSA REQUIREMENTS.
...PRESSURE TESTED @ 5psi
...INTERIOR FREE OF FOREIGN MATTER.
...FILLER CAP & DRAIN PLUG PROVIDED.
...ALUMINUM CONSTRUCTION:
5052-H32 ALUMINUM, BRIGHT FINISH
HEADS ARE 0.100" & SHELL IS 0.125"
...ALL OPENINGS PLUGGED PRIOR TO SHIPPING

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	160-0012	15x25 Head	2
2	273-0038	GM Step Insert	1
3	276-0126	GM-Float Ring Topkick	1
4	217-0002	Top Plate Mount	4
5	260-0005	1/2" FNPT Aluminum weld flange	1
6	316-0004	2" Aluminum Filler Neck	1
7	458-0100	1/2" NPT Ball Check Drain Plug	1
8	276-0040	Float Protector	1
9	452-0998	2" Thermal Relief Fuel Cap	1
10	312-0006	1/2" NPT Coupling	2
11	126-0879	1/8" Aluminum Wrap	1

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/16 ANGULAR: MACH ± 1° BEND ± 1° TWO PLACE DECIMAL ± .06 THREE PLACE DECIMAL ± .031 INTERPRET GEOMETRIC TOLERANCING PER: MATERIAL FINISH DO NOT SCALE DRAWING	DRAWN	NAME	DATE	PROPOW MFG. INC. WINDSOR, ONTARIO, CANADA Ph: 519-737-1197 Fax: 519-737-1918 TOLL FREE 1877-7412365 Web: metaltanks.com TITLE: GM-R15-25RFAS31 42 US GROSS GALLONS 40 USEBLE GALLONS DIESEL FUEL TANK SIZE DWG. NO. REV C 21224-1 SCALE: 1:8 WEIGHT: 40 LBS SHEET 1 OF 2
	CHECKED	A.B	09/23/16	
	ENG APPR.			
	MFG APPR.			
THIRD ANGLE PROJECTION	Q.A.			COMMENTS: