


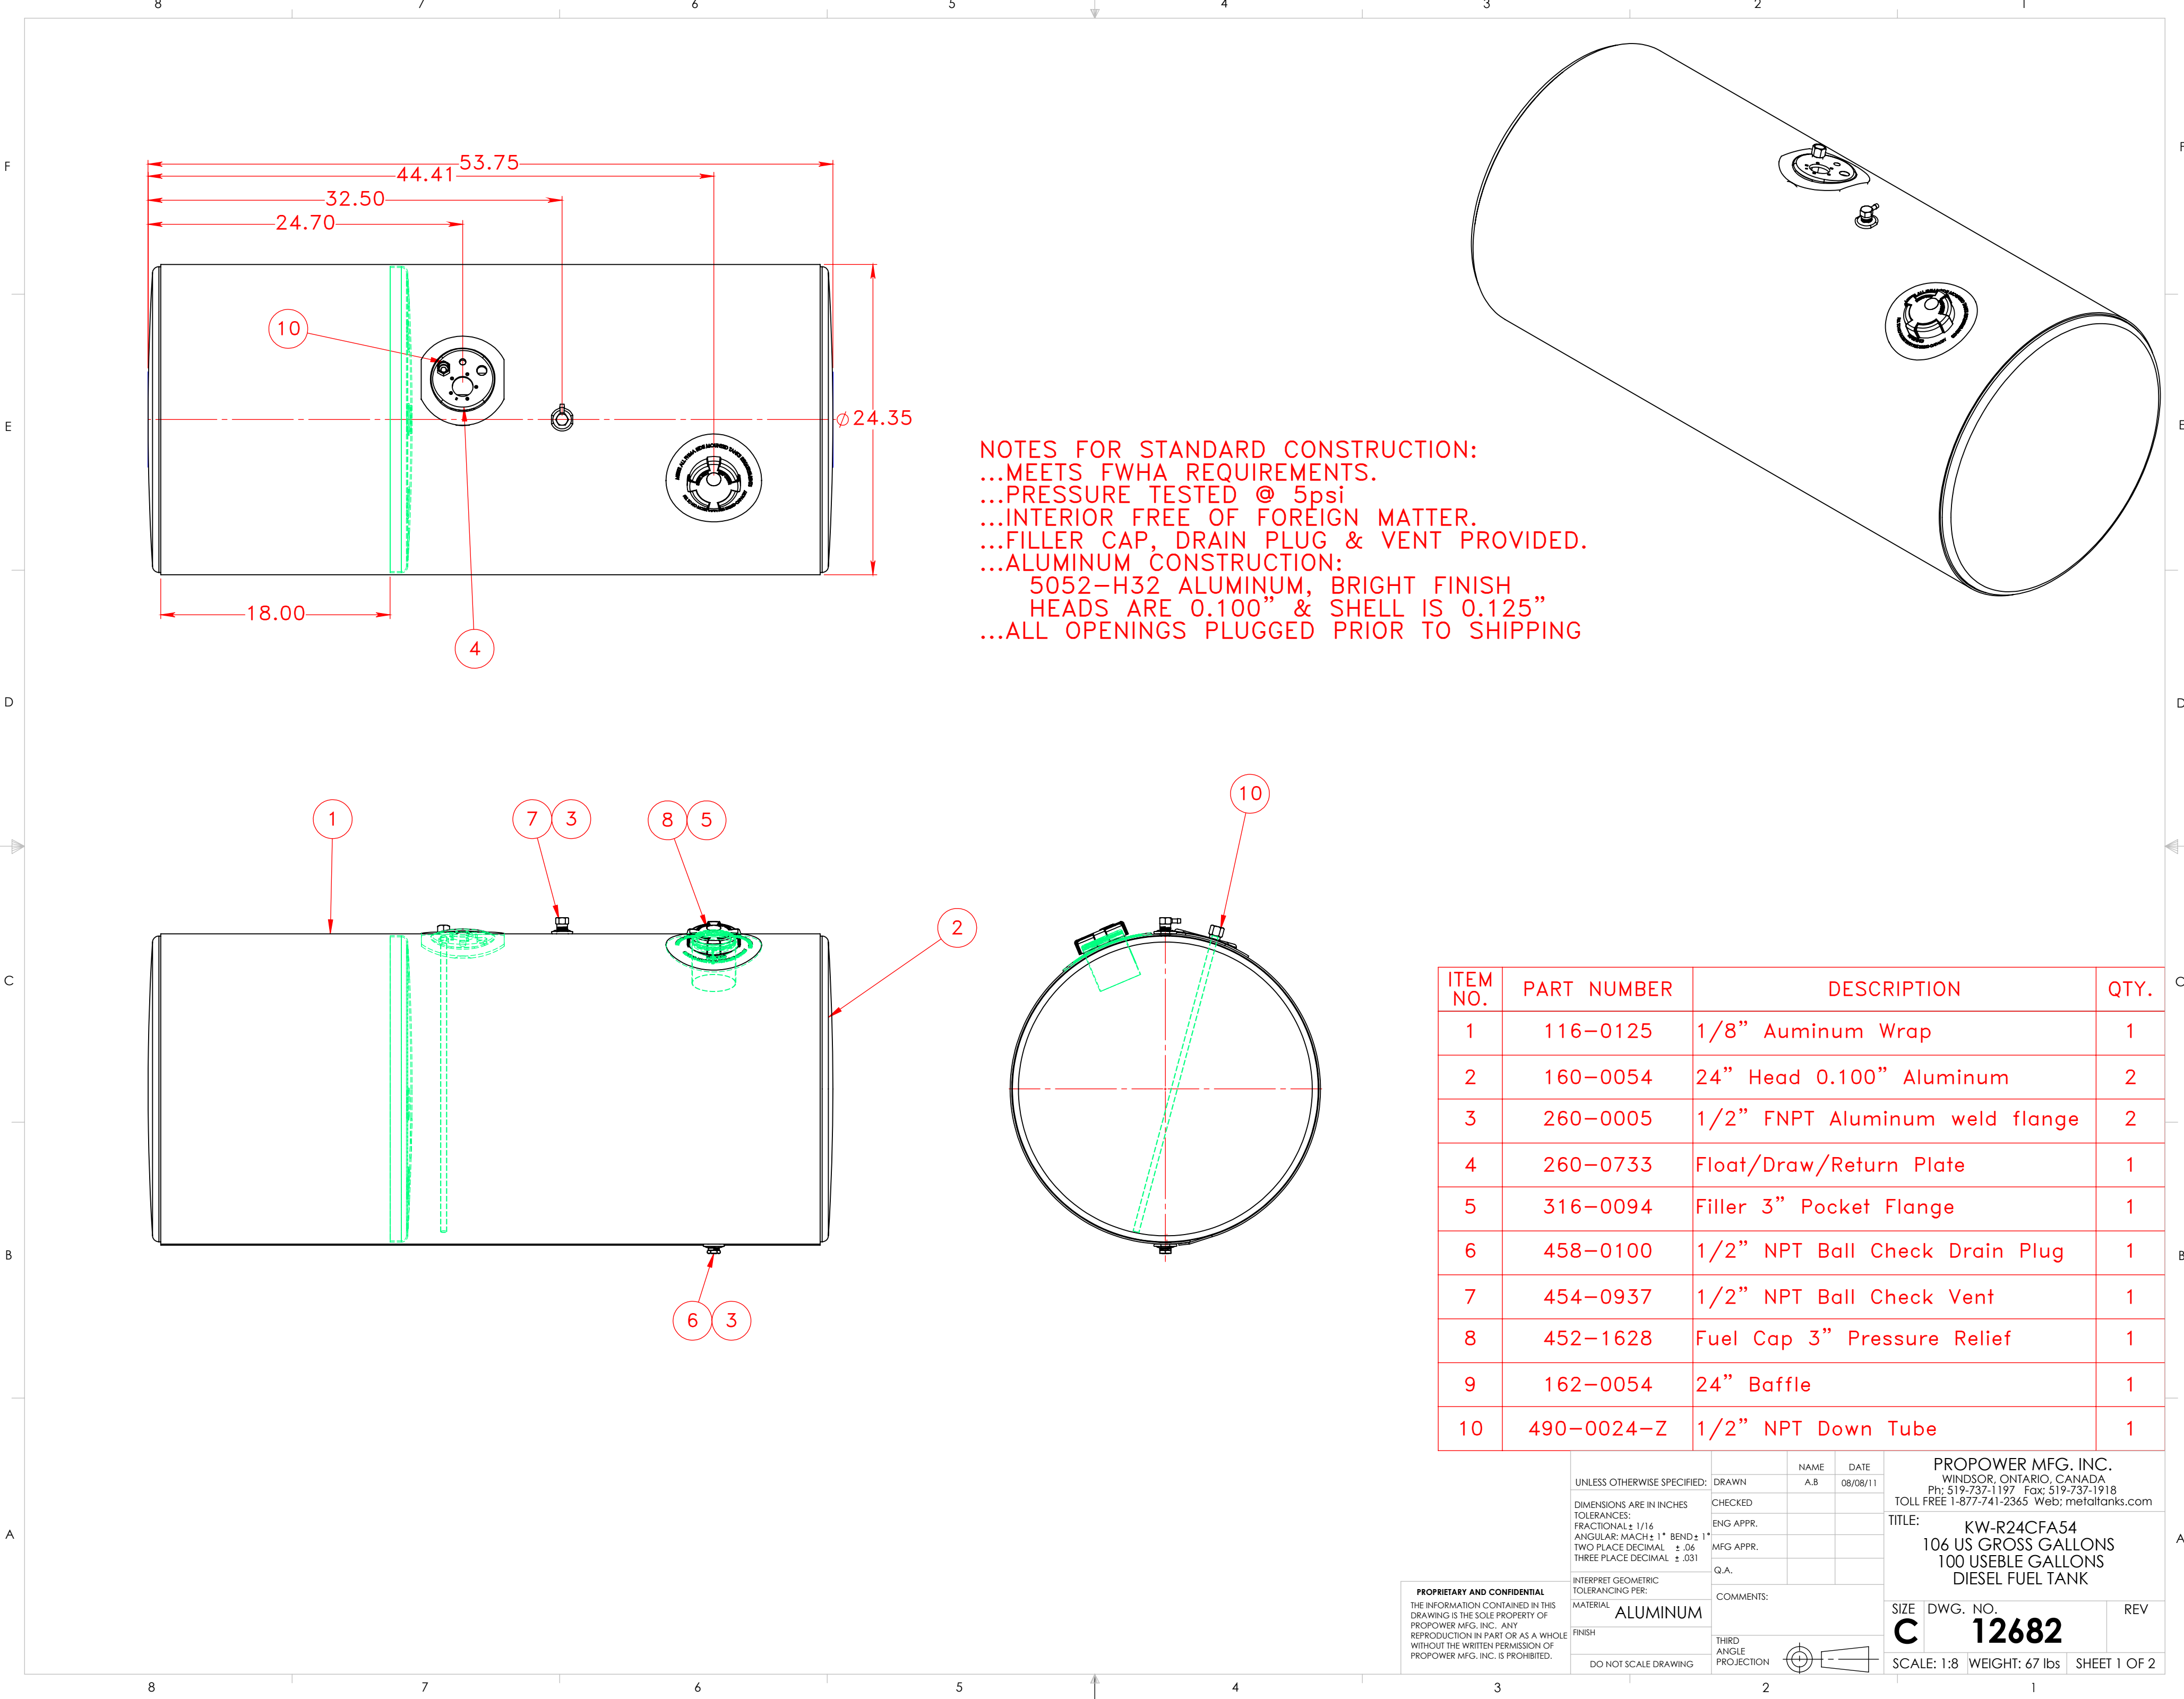

NOTES FOR STANDARD CONSTRUCTION:
...MEETS FWAH REQUIREMENTS.
...PRESSURE TESTED @ 5psi
...INTERIOR FREE OF FOREIGN MATTER.
...FILLER CAP, DRAIN PLUG & VENT PROVIDED.
...ALUMINUM CONSTRUCTION:
5052-H32 ALUMINUM, BRIGHT FINISH
HEADS ARE 0.100" & SHELL IS 0.125"
...ALL OPENINGS PLUGGED PRIOR TO SHIPPING

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	116-0125	1/8" Auminum Wrap	1
2	160-0054	24" Head 0.100" Aluminum	2
3	260-0005	1/2" FNPT Aluminum weld flange	2
4	260-0733	Float/Draw/Return Plate	1
5	316-0094	Filler 3" Pocket Flange	1
6	458-0100	1/2" NPT Ball Check Drain Plug	1
7	454-0937	1/2" NPT Ball Check Vent	1
8	452-1628	Fuel Cap 3" Pressure Relief	1
9	162-0054	24" Baffle	1
10	490-0024-Z	1/2" NPT Down Tube	1

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PROPOWER MFG. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PROPOWER MFG. INC. IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED:	DRAWN	NAME A.B	DATE 08/08/11	PROPOWER MFG. INC. WINDSOR, ONTARIO, CANADA Ph: 519-737-1197 Fax: 519-737-1918 TOLL FREE 1-877-741-2365 Web: metaltanks.com TITLE: KW-R24CFA54 106 US GROSS GALLONS 100 USEBLE GALLONS DIESEL FUEL TANK		
	DIMENSIONS ARE IN INCHES	CHECKED					
	TOLERANCES:	ENG APPR.					
	FRACTIONAL: ± 1/16	MFG APPR.					
	ANGULAR: MACH: ± 1° BEND: ± 1°						
	TWO PLACE DECIMAL ± .06	Q.A.					
	THREE PLACE DECIMAL ± .031						
	INTERPRET GEOMETRIC TOLERANCING PER:	COMMENTS:					
	MATERIAL						
	FINISH	ALUMINUM					
DO NOT SCALE DRAWING	THIRD ANGLE PROJECTION						