

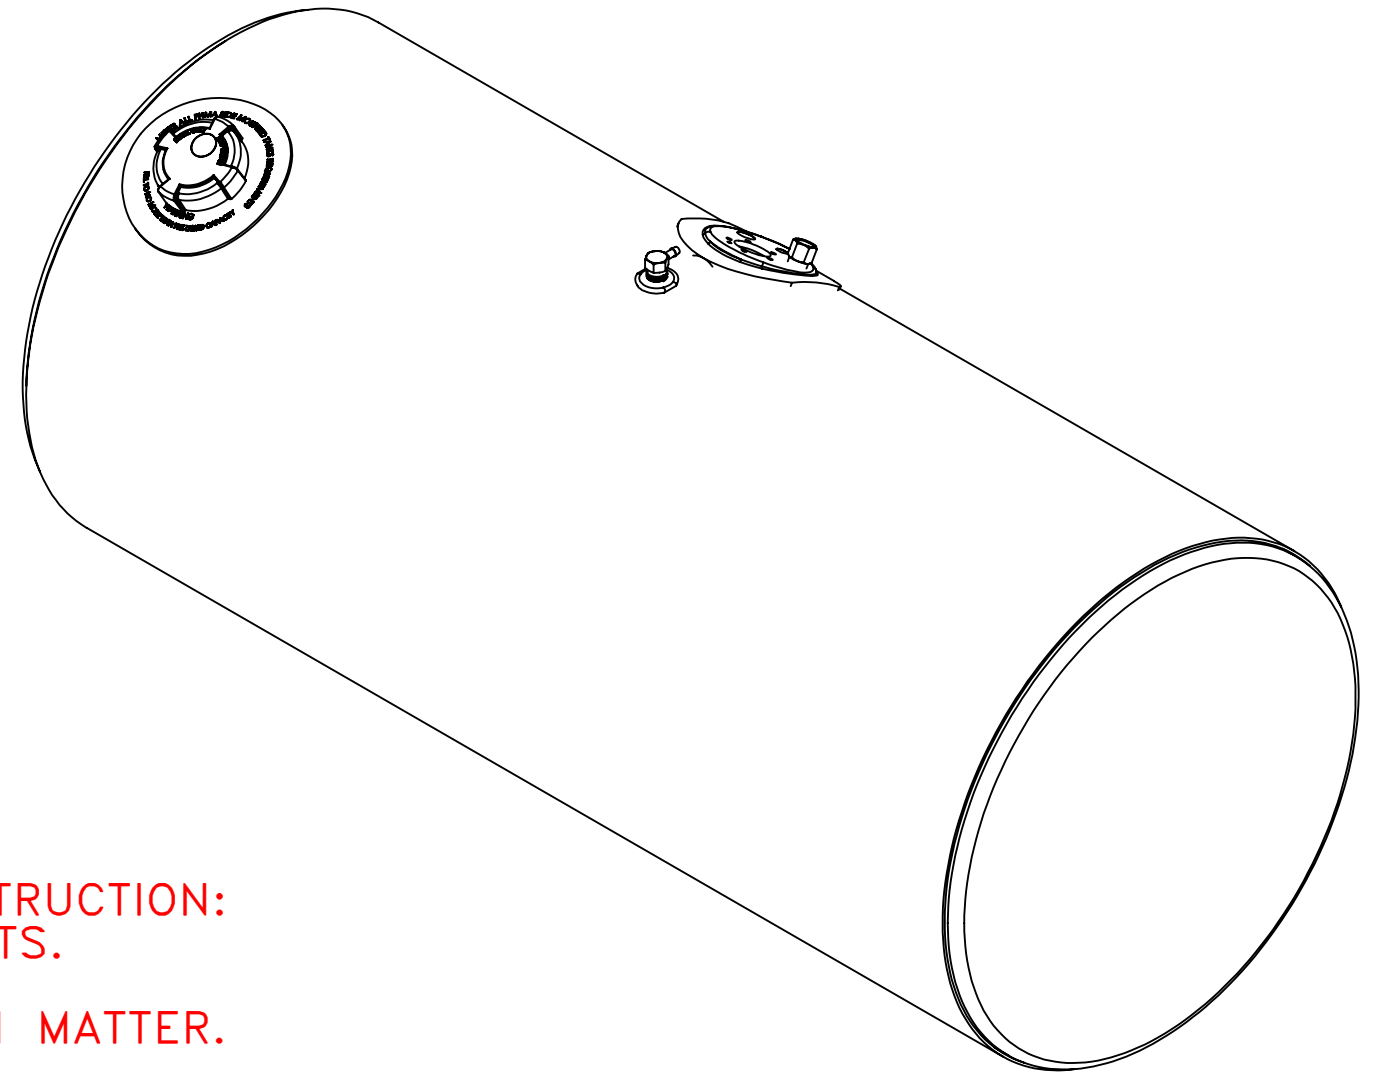
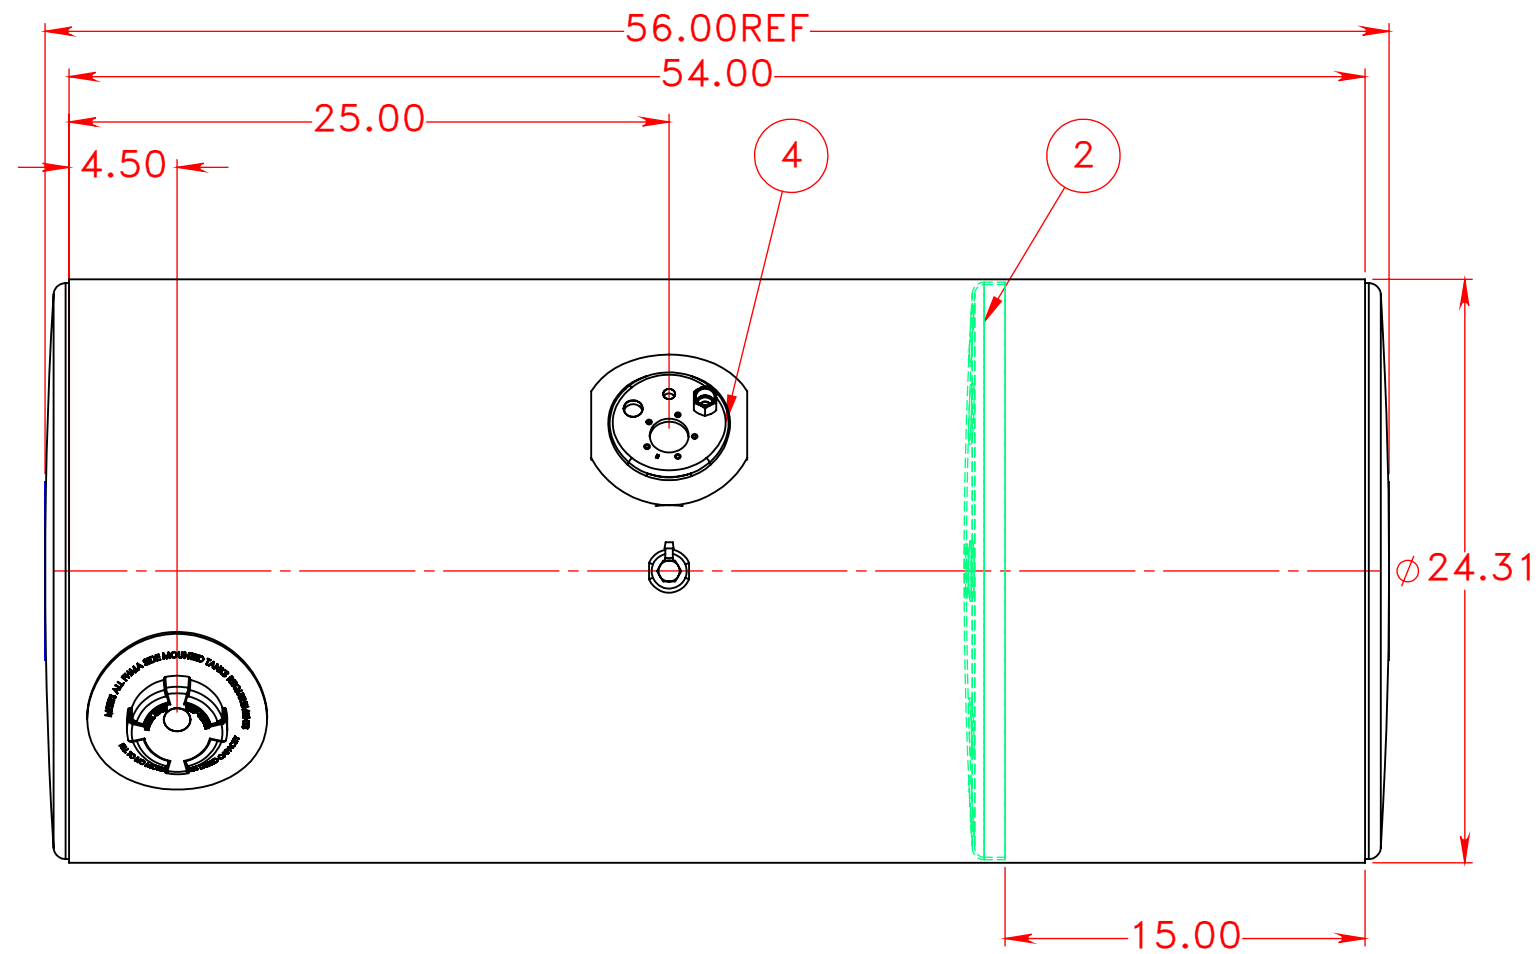


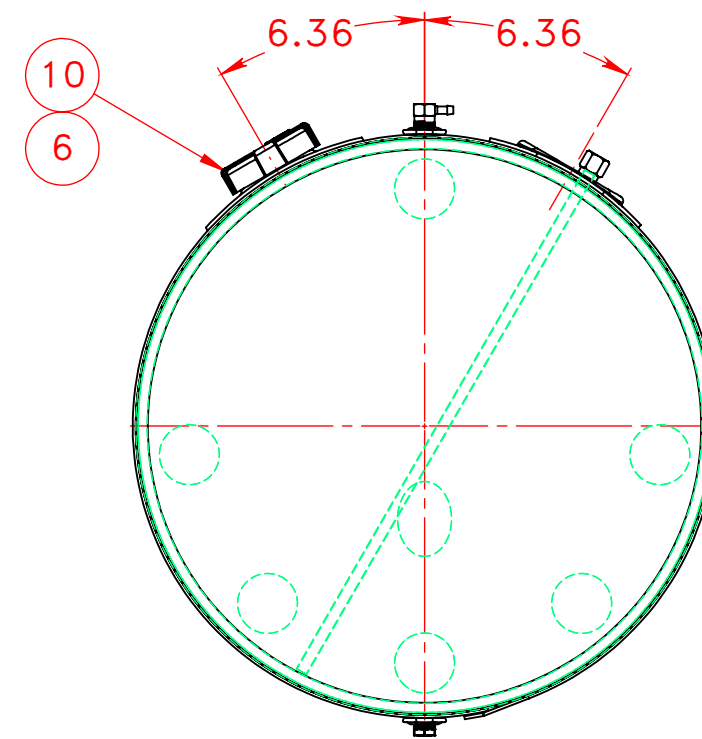

NOTES FOR STANDARD CONSTRUCTION:
...MEETS FMCSA REQUIREMENTS.
...PRESSURE TESTED @ 5psi
...INTERIOR FREE OF FOREIGN MATTER.
...FILLER CAP, DRAIN PLUG,
VENT & DRAW TUBE PROVIDED.
...FULL BAFFLE(S) WHERE SHOWN
...ALUMINUM CONSTRUCTION:
5052-H32 ALUMINUM, BRIGHT FINISH
HEADS ARE 0.100" & SHELL IS 0.125"
...ALL OPENINGS PLUGGED PRIOR TO SHIPPING

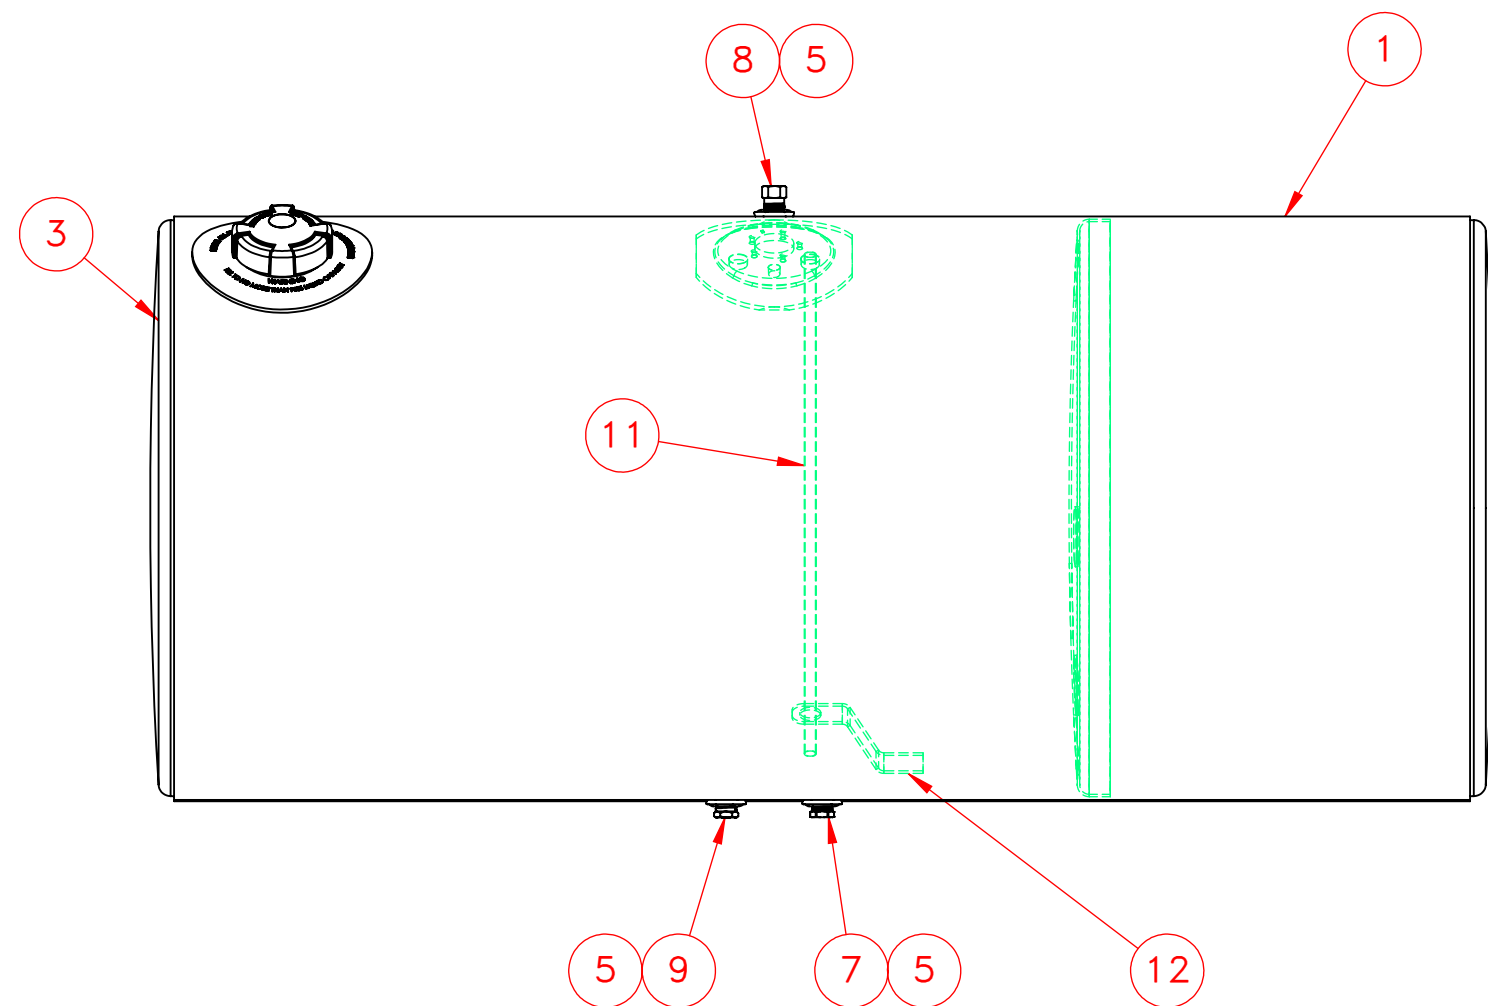

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	116-0106	1/8" Auminum Wrap	1
2	162-0054	24" Baffle	1
3	160-0054	24" Head 0.100" Aluminum	2
4	260-0733	Float/Draw/Return Plate	1
5	260-0005	1/2" FNPT Aluminum weld flange	3
6	316-0094	Filler 3" Pocket Flange	1
7	368-0010	1/2" NPT Brass Plug	1
8	454-0937	1/2" NPT Ball Check Vent	1
9	458-0100	1/2" NPT Ball Check Drain Plug	1
10	452-1628	Fuel Cap 3" Pressure Relief	1
11	490-0024-Z	1/2" NPT Down Tube	1
12	490-3001	Down Tube Support	1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
PROPOWER MFG. INC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
PROPOWER MFG. INC. IS PROHIBITED.

		NAME		DATE		PROPOWER MFG. INC. WINDSOR, ONTARIO, CANADA Ph: 519-737-1197 Fax: 519-737-1918 TOLL FREE 1-877-741-2365 Web: metaltanks.com			
UNLESS OTHERWISE SPECIFIED:		DRAWN		A.B		06/22/11		TITLE: KW-R24CFA56 110 US GROSS GALLONS 104 USEBLE GALLONS DIESEL FUEL TANK	
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL $\pm 1/16$ ANGULAR: MACH $\pm 1^\circ$ BEND $\pm 1^\circ$ TWO PLACE DECIMAL $\pm .06$ THREE PLACE DECIMAL $\pm .031$		CHECKED							
		ENG APPR.							
		MFG APPR.							
INTERPRET GEOMETRIC TOLERANCING PER: MATERIAL		Q.A.						SIZE DWG. NO. C 12572	
ALUMINUM		COMMENTS:							
FINISH									
DO NOT SCALE DRAWING		THIRD ANGLE PROJECTION				SCALE: 1:8		WEIGHT: 69 lbs	SHEET 1 OF 2