

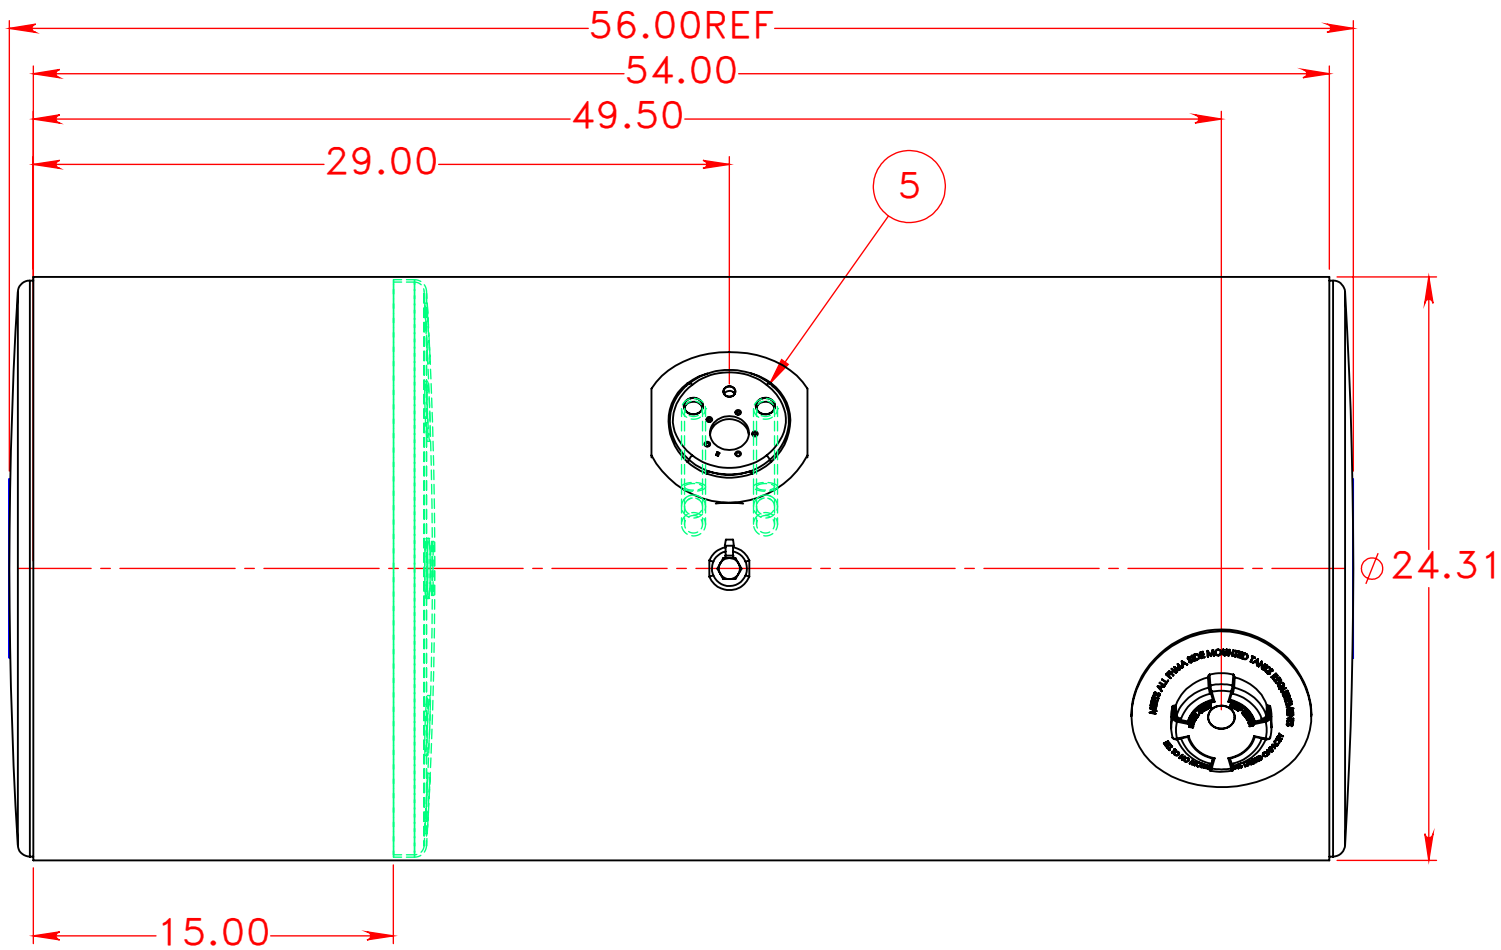
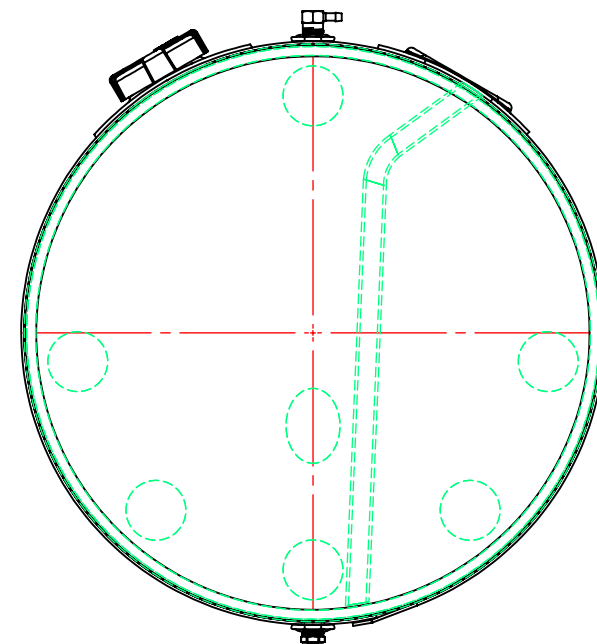


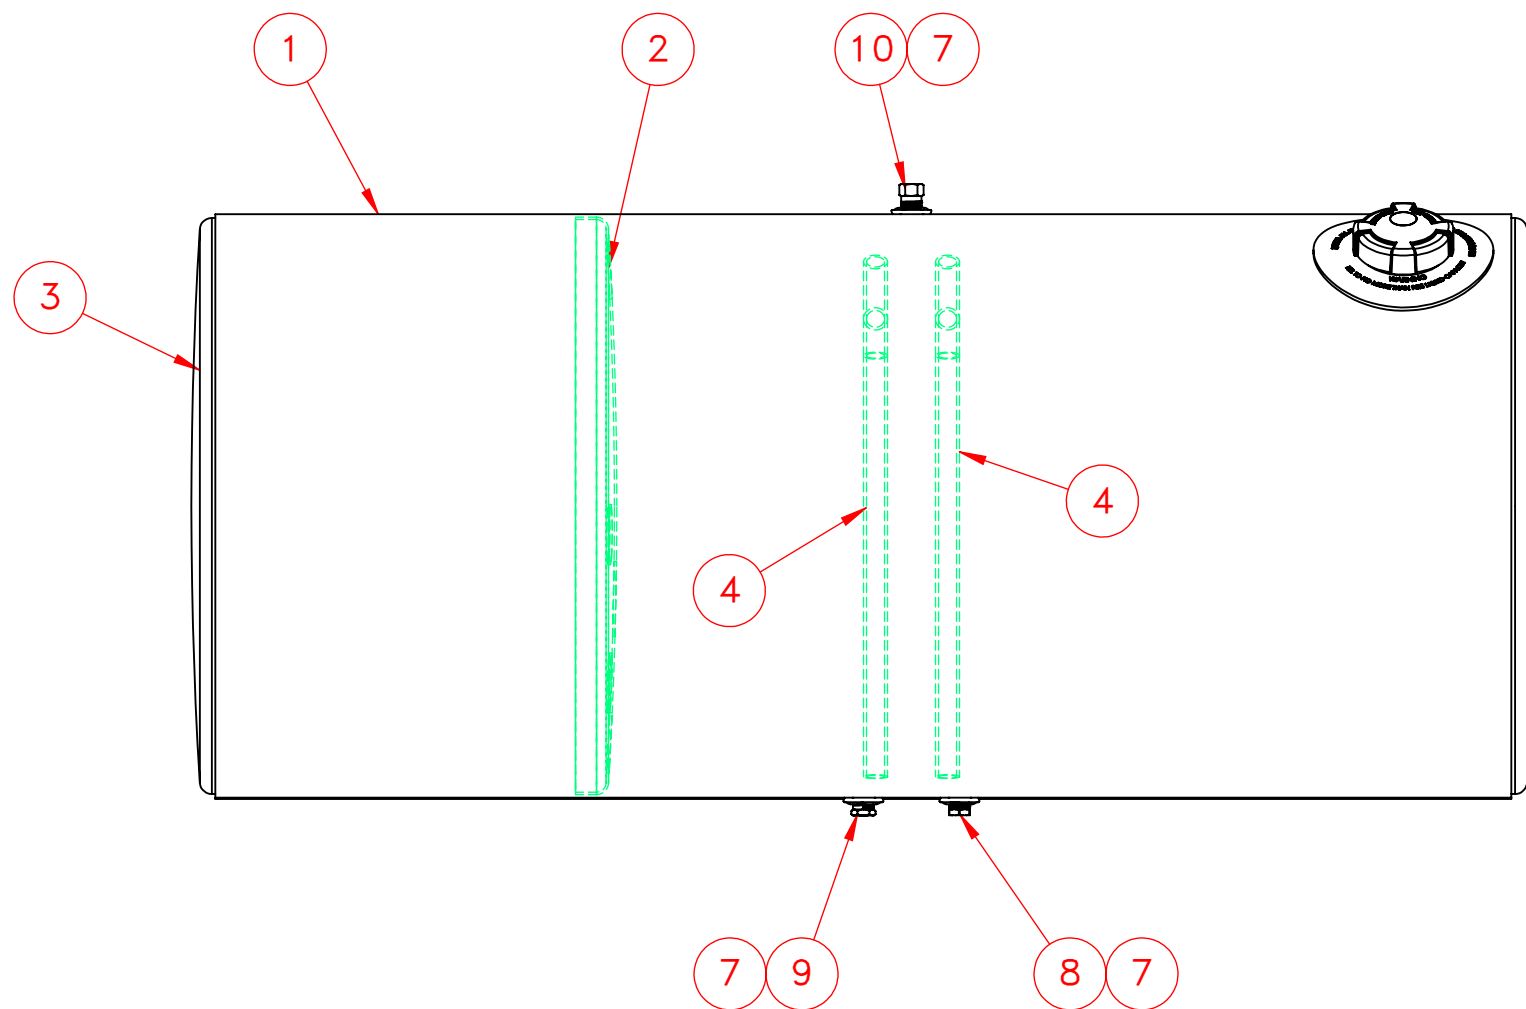

NOTES FOR STANDARD CONSTRUCTION:
...MEETS FMCSA REQUIREMENTS.
...PRESSURE TESTED @ 5psi
...INTERIOR FREE OF FOREIGN MATTER.
...FILLER CAP, DRAIN PLUG,
VENT & DRAW TUBE PROVIDED.
...FULL BAFFLE(S) WHERE SHOWN
...ALUMINUM CONSTRUCTION:
5052-H32 ALUMINUM, BRIGHT FINISH
HEADS ARE 0.100" & SHELL IS 0.125"
...ALL OPENINGS PLUGGED PRIOR TO SHIPPING

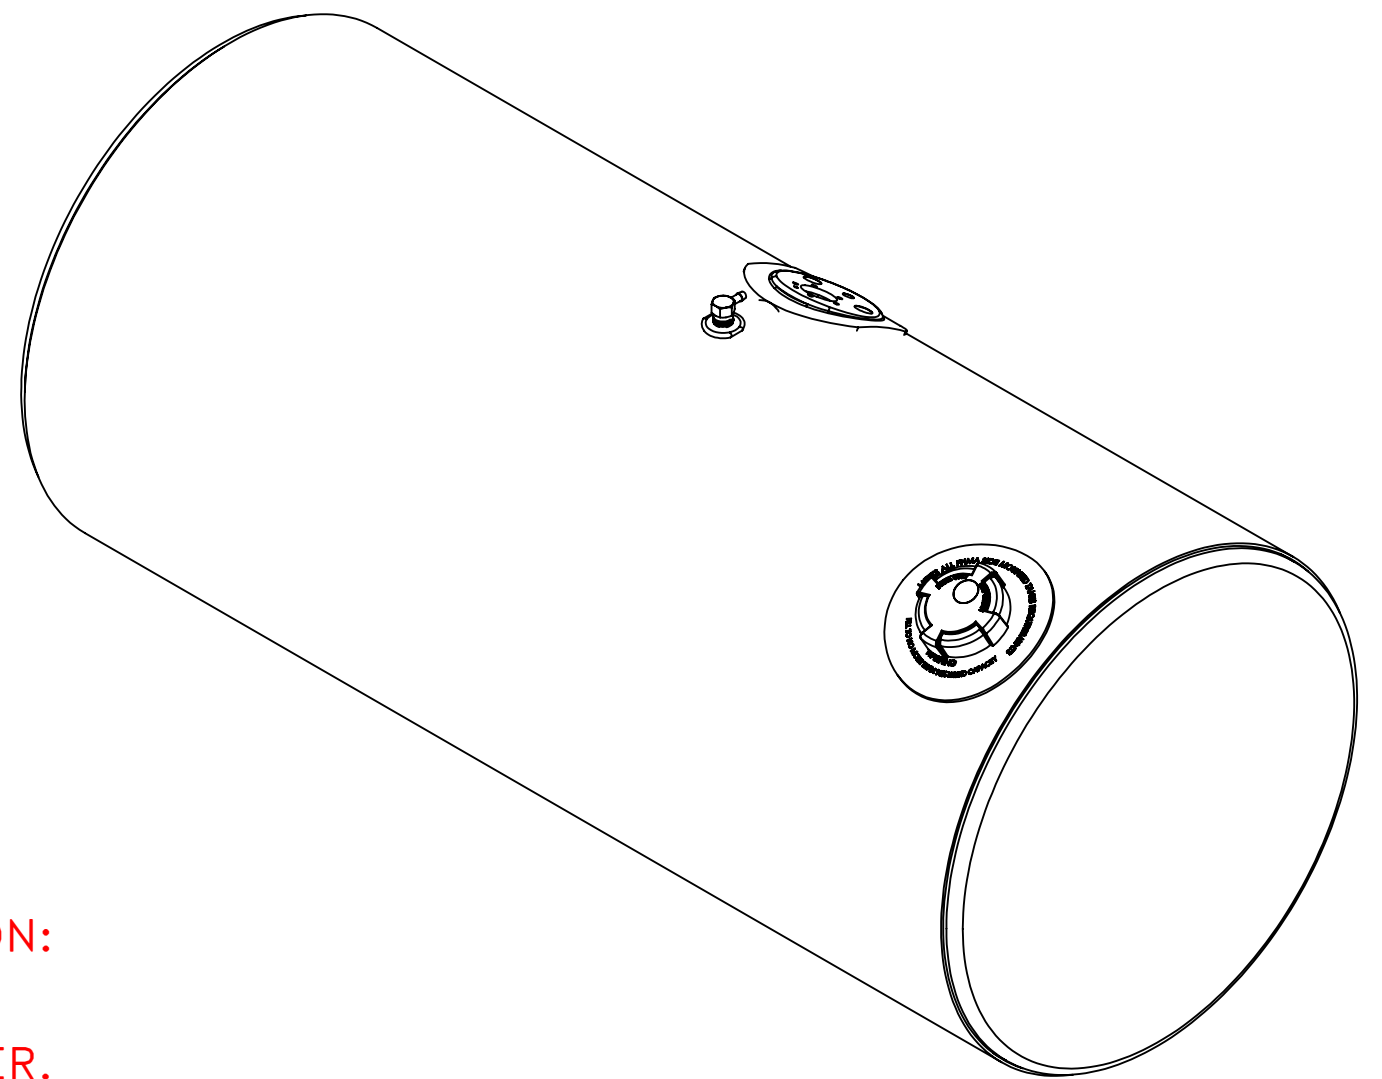

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	116-0352	1/8" Auminum Wrap	1
2	162-0054	24" Baffle	1
3	160-0054	24" Head 0.100" Aluminum	2
4	490-0103	Down Tube	2
5	260-0733	Float/Draw/Return Plate	1
6	316-0094	Filler 3" Pocket Flange	1
7	260-0005	1/2" FNPT Aluminum weld flange	3
8	368-0010	1/2" NPT Brass Plug	1
9	458-0100	1/2" NPT Ball Check Drain Plug	1
10	454-0937	1/2" NPT Ball Check Vent	1
11	452-1628	Fuel Cap 3" Pressure Relief	1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
PROPOWER MFG. INC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
PROPOWER MFG. INC. IS PROHIBITED.

		NAME		DATE		PROPOWER MFG. INC. WINDSOR, ONTARIO, CANADA Ph: 519-737-1197 Fax: 519-737-1918 TOLL FREE 1-877-741-2365 Web: metaltanks.com					
UNLESS OTHERWISE SPECIFIED:		DRAWN		A.B		04/30/12		TITLE: KW-L24CFA56 110 US GROSS GALLONS 104 USEBLE GALLONS DIESEL FUEL TANK			
DIMENSIONS ARE IN INCHES		CHECKED									
TOLERANCES:		ENG APPR.									
FRACTIONAL ± 1/16		MFG APPR.									
ANGULAR: MACH ± 1° BEND ± 1°		Q.A.									
TWO PLACE DECIMAL ± .06								SIZE DWG. NO. REV C 13714			
THREE PLACE DECIMAL ± .031											
INTERPRET GEOMETRIC TOLERANCING PER:		COMMENTS:						SCALE: 1:8 WEIGHT: 70 LBS SHEET 1 OF 2			
MATERIAL											
ALUMINUM											
FINISH											
DO NOT SCALE DRAWING											
		THIRD ANGLE PROJECTION									