
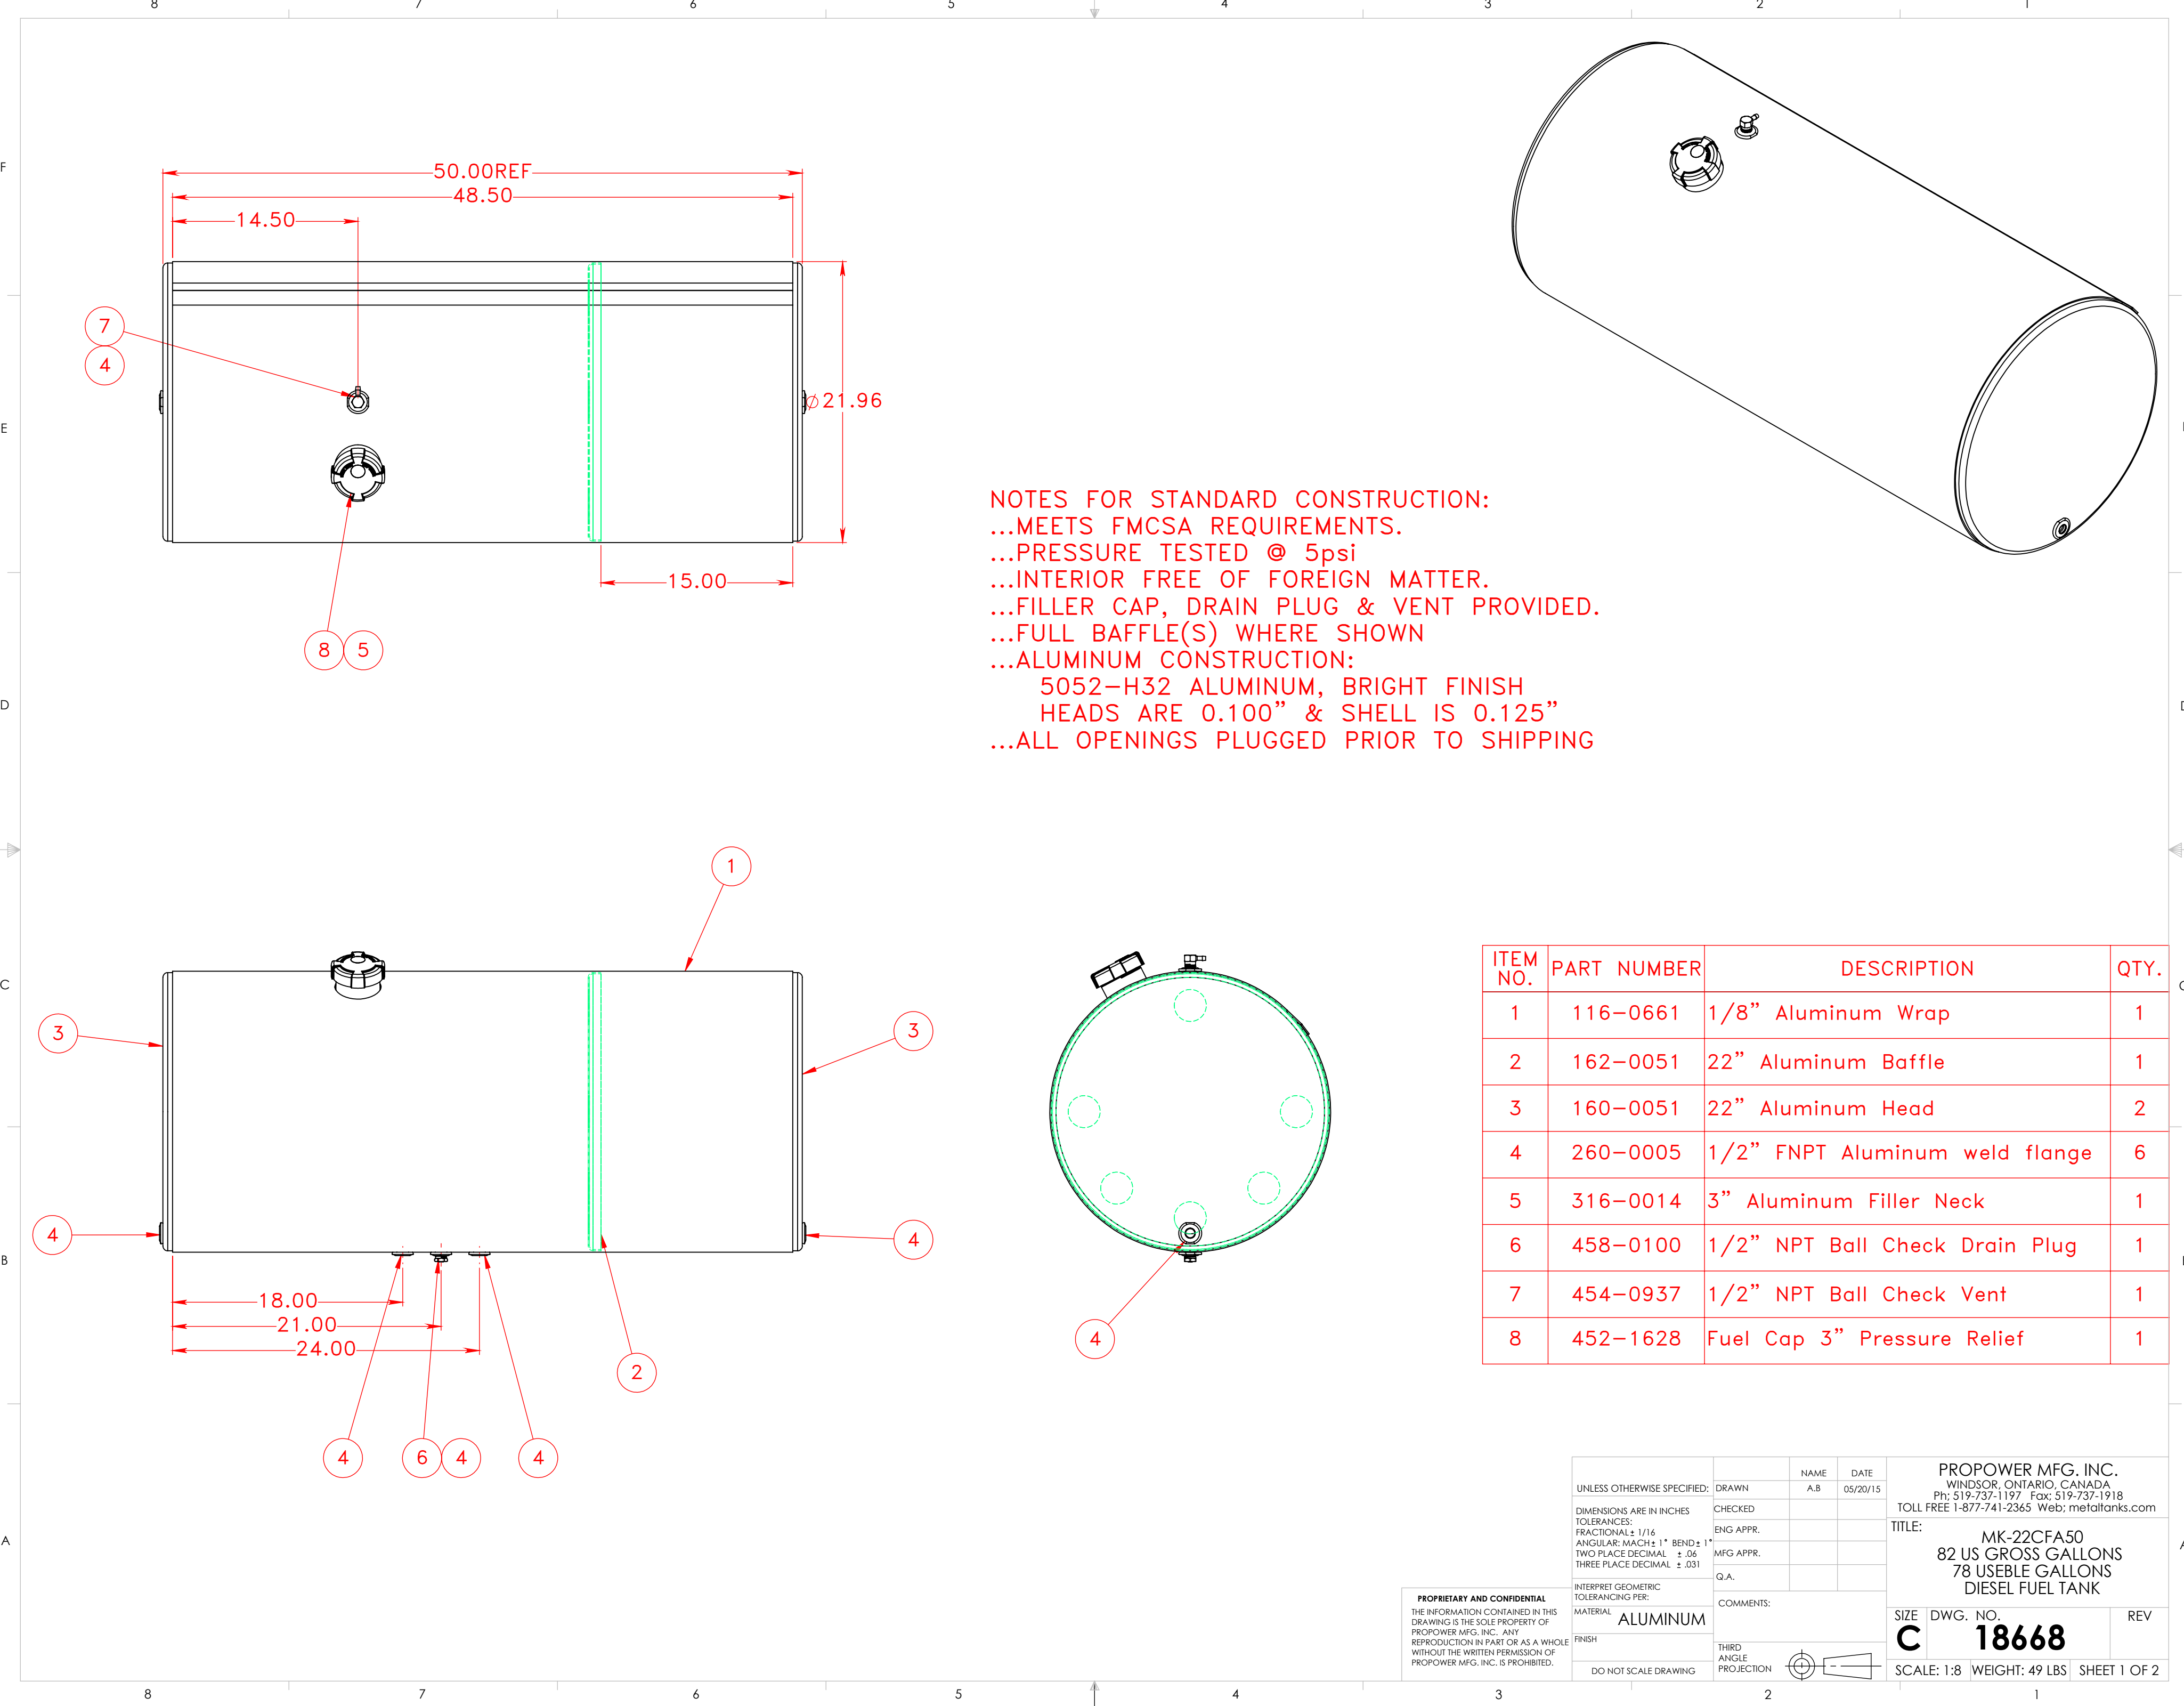




NOTES FOR STANDARD CONSTRUCTION:
...MEETS FMCSA REQUIREMENTS.
...PRESSURE TESTED @ 5psi
...INTERIOR FREE OF FOREIGN MATTER.
...FILLER CAP, DRAIN PLUG & VENT PROVIDED.
...FULL BAFFLE(S) WHERE SHOWN
...ALUMINUM CONSTRUCTION:
5052-H32 ALUMINUM, BRIGHT FINISH
HEADS ARE 0.100" & SHELL IS 0.125"
...ALL OPENINGS PLUGGED PRIOR TO SHIPPING

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	116-0661	1/8" Aluminum Wrap	1
2	162-0051	22" Aluminum Baffle	1
3	160-0051	22" Aluminum Head	2
4	260-0005	1/2" FNPT Aluminum weld flange	6
5	316-0014	3" Aluminum Filler Neck	1
6	458-0100	1/2" NPT Ball Check Drain Plug	1
7	454-0937	1/2" NPT Ball Check Vent	1
8	452-1628	Fuel Cap 3" Pressure Relief	1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
PROPOWER MFG. INC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
PROPOWER MFG. INC. IS PROHIBITED.

		NAME		DATE		PROPOWER MFG. INC. WINDSOR, ONTARIO, CANADA Ph: 519-737-1197 Fax: 519-737-1918 TOLL FREE 1-877-741-2365 Web: metaltanks.com			
UNLESS OTHERWISE SPECIFIED:		DRAWN		A.B		05/20/15		TITLE: MK-22CFA50 82 US GROSS GALLONS 78 USEBLE GALLONS DIESEL FUEL TANK SIZE DWG. NO. REV C 18668	
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/16 ANGULAR: MACH ± 1° BEND ± 1° TWO PLACE DECIMAL ± .06 THREE PLACE DECIMAL ± .031		CHECKED							
		ENG APPR.							
		MFG APPR.							
INTERPRET GEOMETRIC TOLERANCING PER:		Q.A.							
MATERIAL		COMMENTS:							
ALUMINUM									
FINISH		THIRD ANGLE PROJECTION							
DO NOT SCALE DRAWING									