

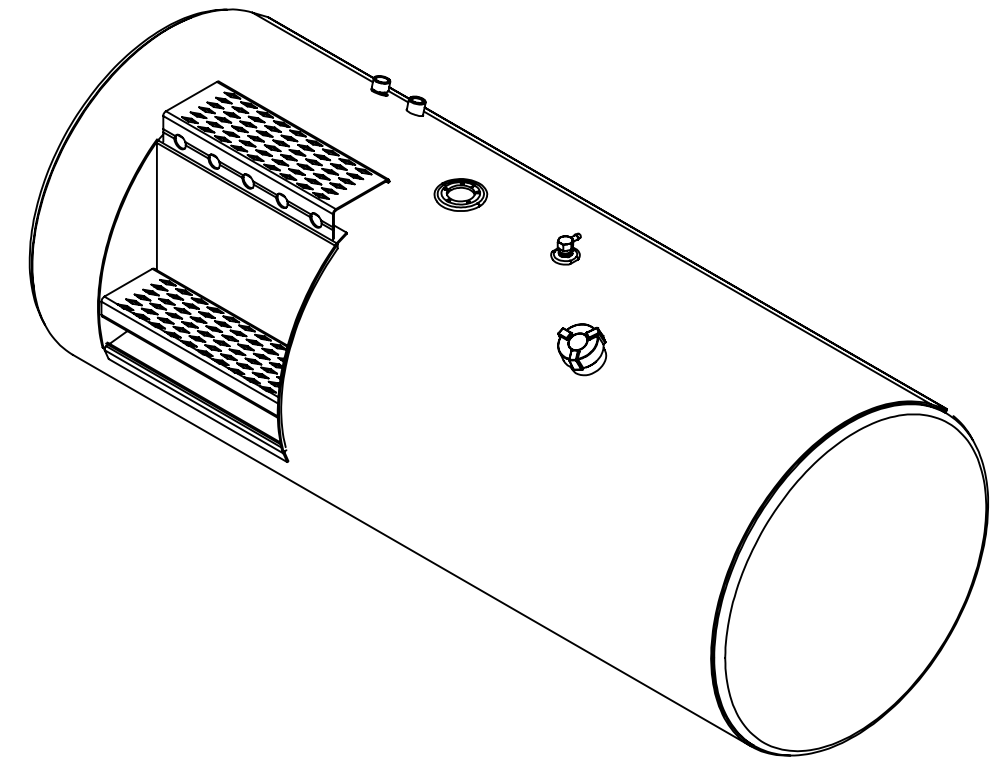
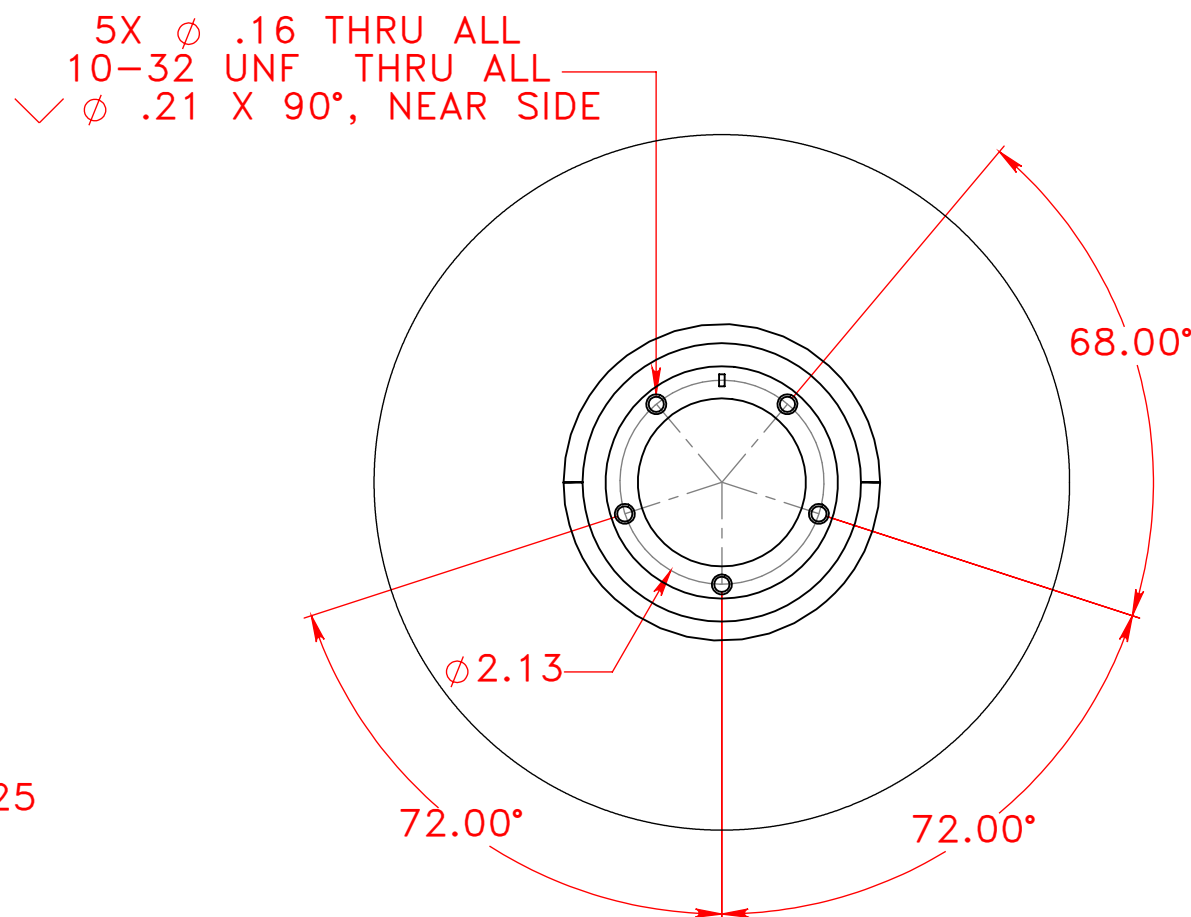
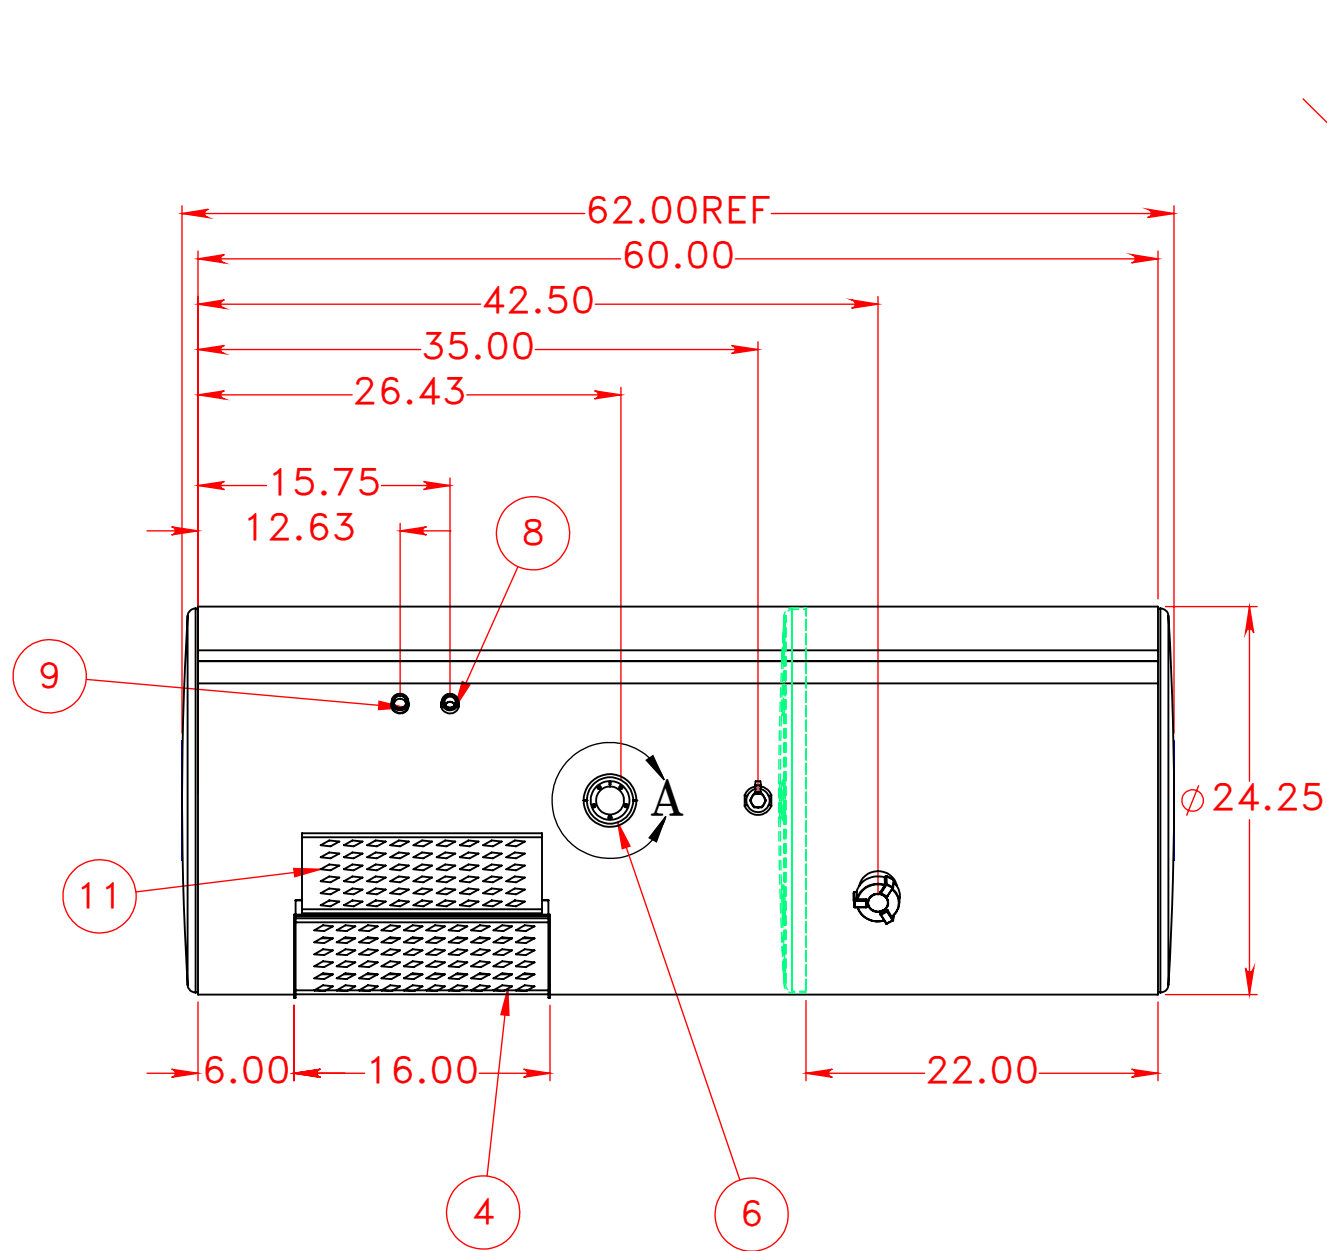


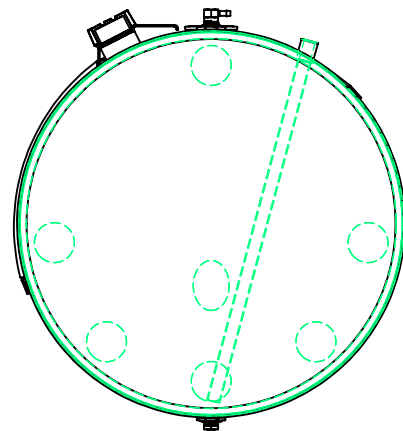

DETAIL A
SCALE 1 : 2

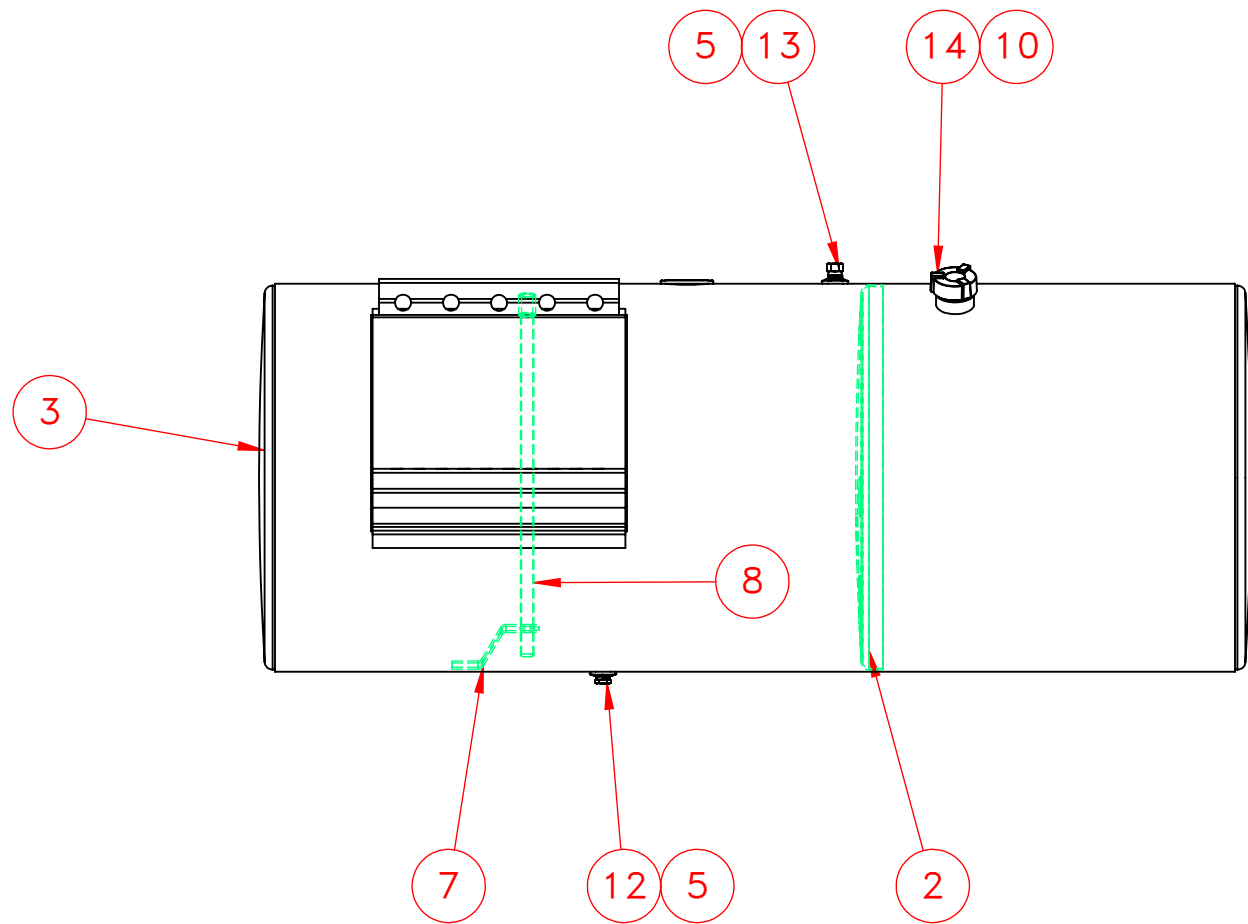

NOTES FOR STANDARD CONSTRUCTION:
...MEETS FMCSA REQUIREMENTS.
...PRESSURE TESTED @ 5psi
...INTERIOR FREE OF FOREIGN MATTER.
...FILLER CAP, DRAIN PLUG & VENT PROVIDED.
...FULL BAFFLE(S) WHERE SHOWN
...ALUMINUM CONSTRUCTION:
5052-H32 ALUMINUM, BRIGHT FINISH
HEADS ARE 0.100" & SHELL IS 0.125"
...ALL OPENINGS PLUGGED PRIOR TO SHIPPING

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	116-0817	1/8" Aluminum Wrap	1
2	162-0054	24" Baffle	1
3	160-0054	24" Head 0.100" Aluminum	2
4	277-0006	Step Insert	1
5	260-0005	1/2" FNPT Aluminum weld flange	2
6	265-0009	Aluminum Float Riser	1
7	490-3001	Down Tube Support	1
8	490-0100	1/2" NPT Down Tube	1
9	332-0006	1/2" NPT Stainless Half Coupling	1
10	316-0004	2" Aluminum Filler Neck	1
11	219-0001	Aluminum Step Material	1
12	458-0100	1/2" NPT Ball Check Drain Plug	1
13	454-0937	1/2" NPT Ball Check Vent	1
14	452-0998	2" Thermal Relief Fuel Cap	1

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PROPOPOWER MFG. INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PROPOPOWER MFG. INC. IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED:	DRAWN	NAME A.B	DATE 04/27/16	PROPOPOWER MFG. INC. WINDSOR, ONTARIO, CANADA Ph: 519-737-1197 Fax: 519-737-1918 TOLL FREE 1-877-741-2365 Web: metaltanks.com		
	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL $\pm 1/16$ ANGULAR: MACH $\pm 1^\circ$ BEND $\pm 1^\circ$ TWO PLACE DECIMAL $\pm .06$ THREE PLACE DECIMAL $\pm .031$	CHECKED			TITLE: MK-L24CFA2S62 118 US GROSS GALLONS 112 USEBLE GALLONS DIESEL FUEL TANK		
		ENG APPR.					
		MFG APPR.					
		Q.A.					
	INTERPRET GEOMETRIC TOLERANCING PER: MATERIAL	COMMENTS:				SIZE DWG. NO. REV C20420	
	FINISH	THIRD ANGLE PROJECTION					
	DO NOT SCALE DRAWING						