


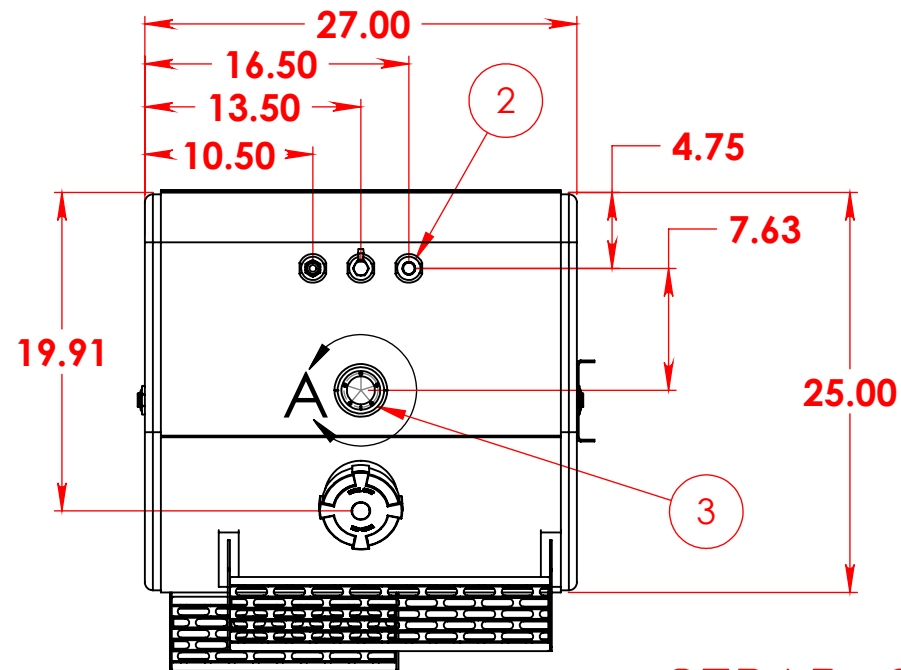


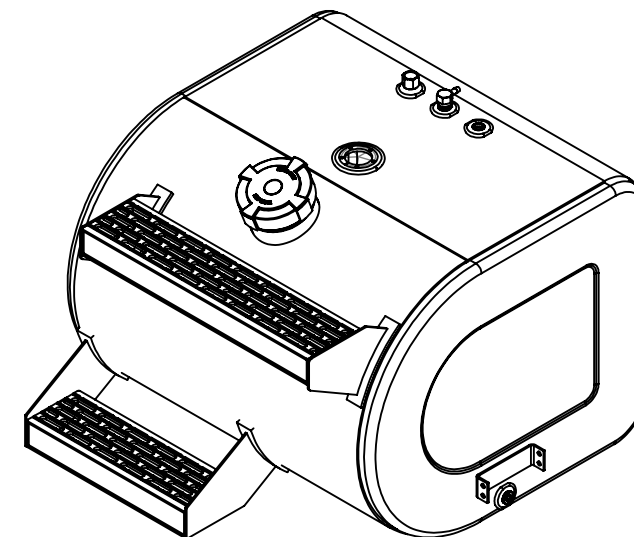

NOTES FOR STANDARD CONSTRUCTION:
...MEETS FMCSA REQUIREMENTS.
...PRESSURE TESTED @ 5psi
...INTERIOR FREE OF FOREIGN MATTER.
...FILLER CAP, DRAIN PLUG & VENT PROVIDED.
...REPLACEABLE DRAW TUBE
...FULL BAFFLE(S) WHERE SHOWN
...ALUMINUM CONSTRUCTION:
5052-H32 ALUMINUM, BRIGHT FINISH
HEADS ARE 0.100" & SHELL IS 0.125"
...ALL OPENINGS PLUGGED PRIOR TO SHIPPING

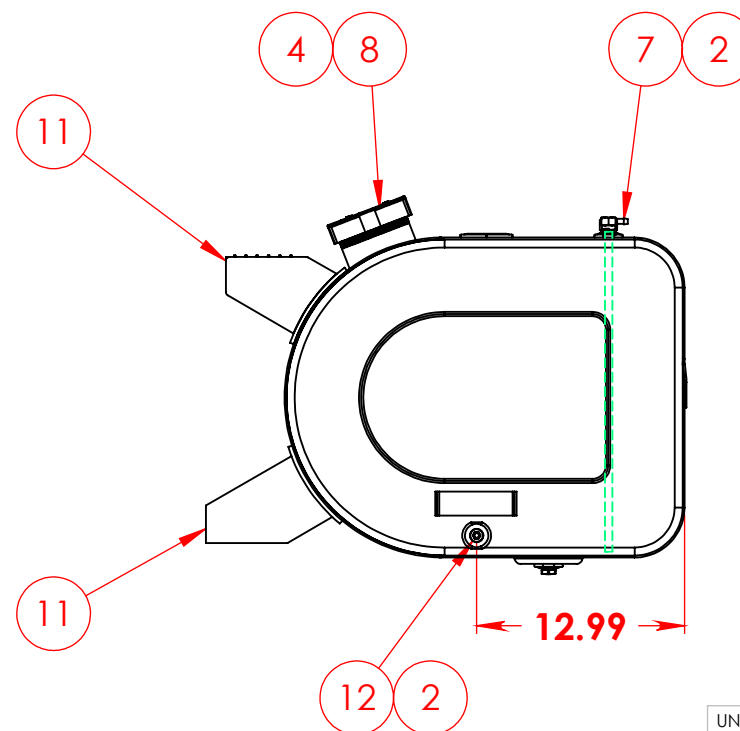


STRAP SIZE 40" LOOP TO LOOP 2 T

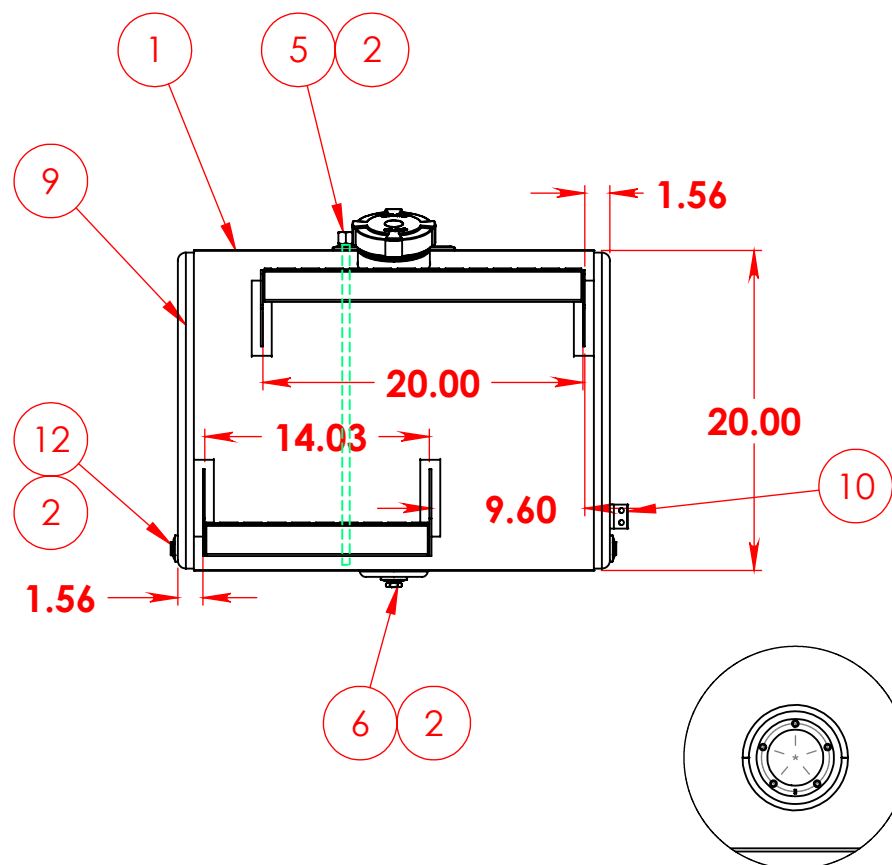

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	116-0005	1/8" Aluminum Sheet	1
2	260-0005	1/2" FNPT Aluminum weld flange	6
3	265-0010	Aluminum Float Riser	1
4	326-0020	4" Filler Neck	1
5	490-0020-Z	1/2" NPT Down Tube	1
6	458-0100	1/2" NPT Ball Check Drain Plug	1
7	454-0937	1/2" NPT Ball Check Vent	1
8	452-1015	4" Pressure Relief Fuel Cap	1
9	170-0040	20x25 D Head	2
10	276-0047	CrossoverSupporBkt	1
11	219-0001	Step	2
12	368-0020	1/2" NPT Hex Brass Plug	2

DETAIL A
SCALE 1 : 6

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
PROPOWER MFG. INC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
PROPOWER MFG. INC. IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	PROPOWER MFG. INC. WINDSOR, ONTARIO, CANADA Ph; 519-737-1197 Fax; 519-737-1918 TOLL FREE 1-877-741-2365 Web; metaltanks.com	
DIMENSIONS ARE IN INCHES		DRAWN	02/16/11		
TOLERANCES:		CHECKED			
FRACTIONAL ± 1/16		ENG APPR.			
ANGULAR: MACH ± 1° BEND ± 1°		MFG APPR.			
TWO PLACE DECIMAL ± .06				TITLE: FD-R20-25DFA2S27 53 US GROSS GALLONS 50 USEBLE GALLONS DIESEL FUEL TANK	
THREE PLACE DECIMAL ± .031					
INTERPRET GEOMETRIC TOLERANCING PER:		Q.A.			
MATERIAL		COMMENTS:			
FINISH		THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING				DWG. NO. 13034	
				SIZE B	REV
				SCALE: 1:12 WEIGHT: SHEET 1 OF 2	