

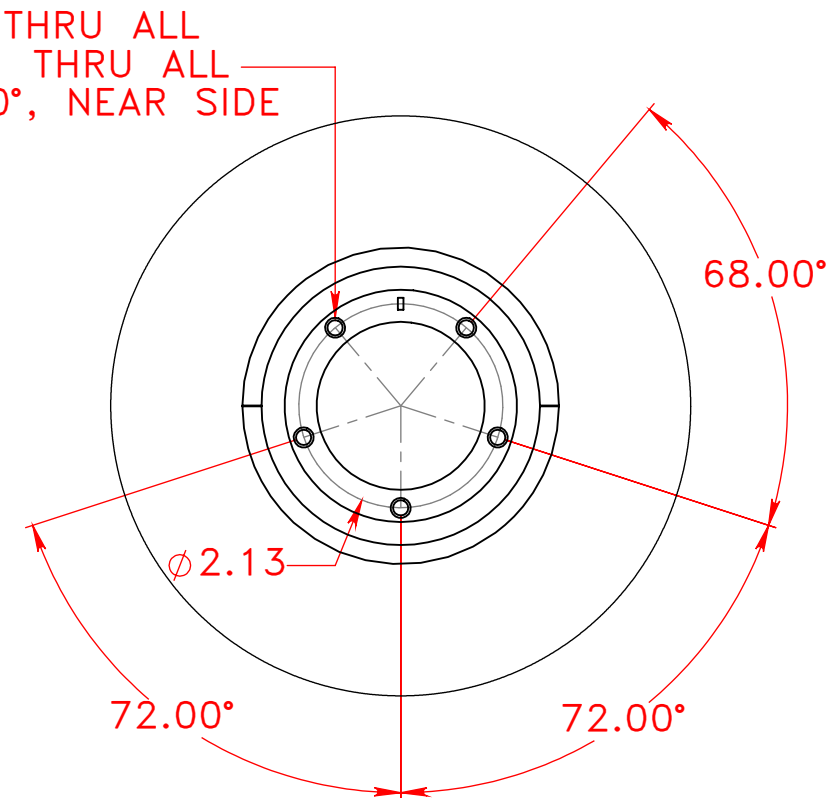
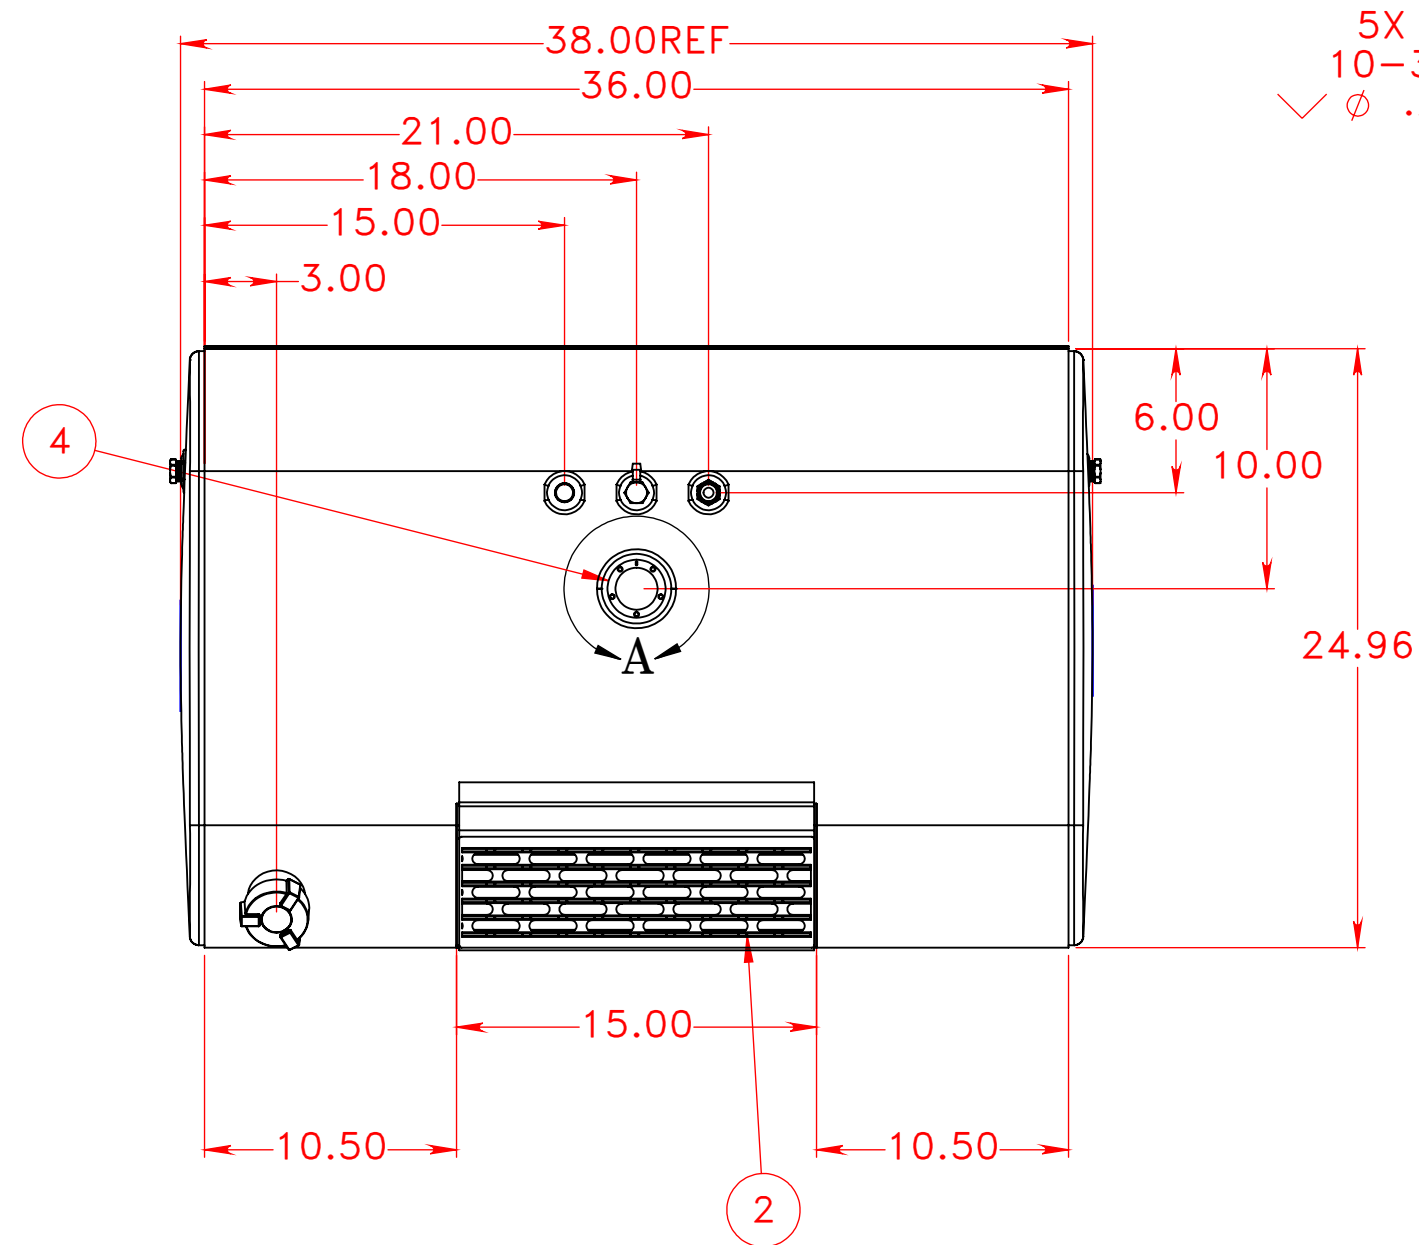
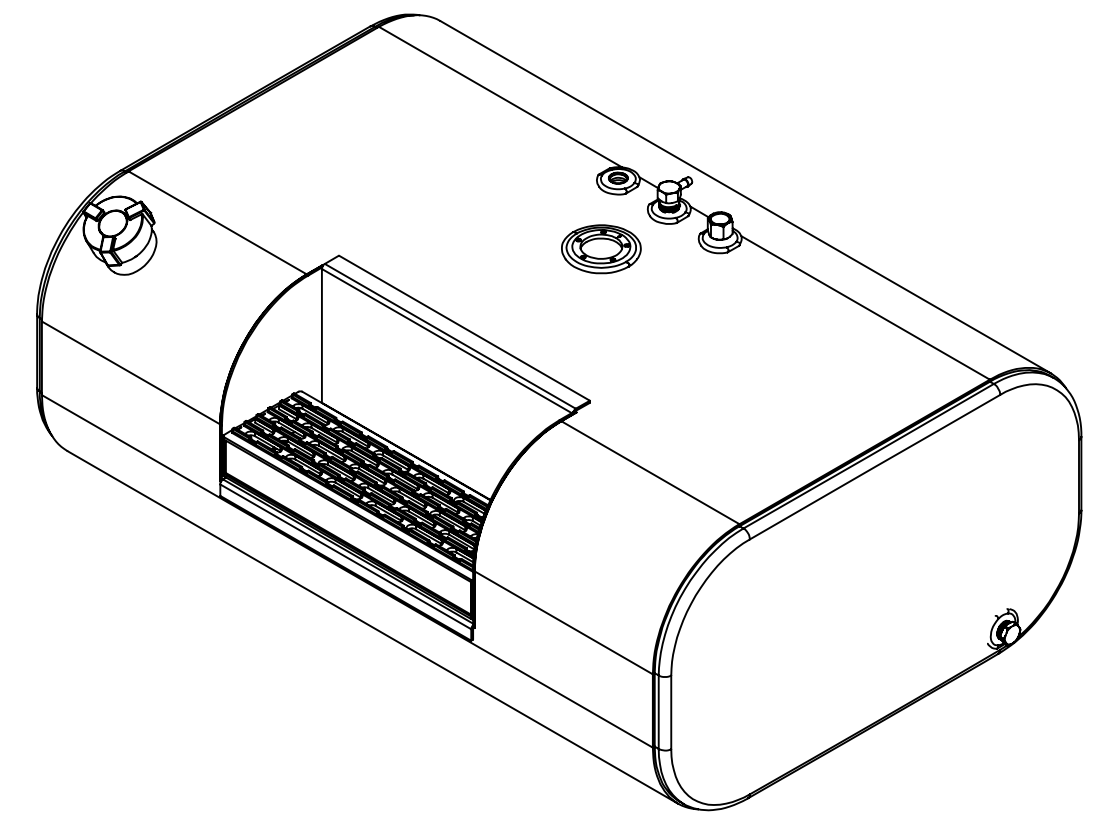


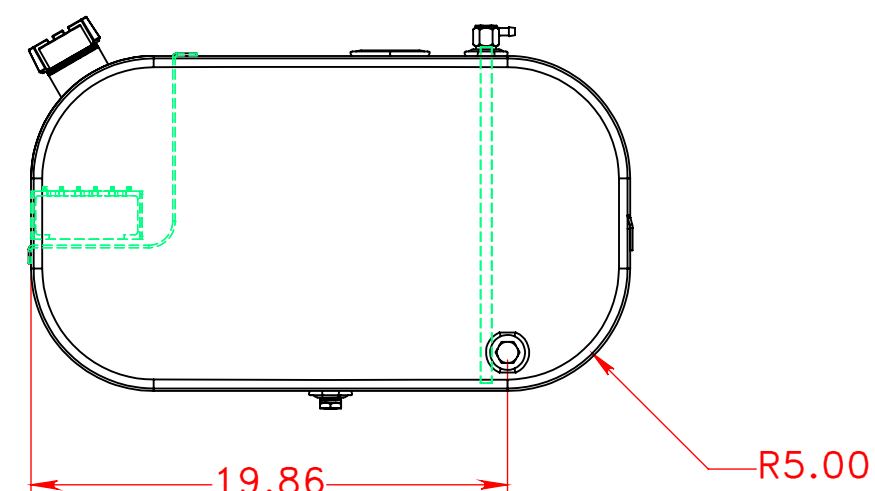

DETAIL A
SCALE 1 : 2

DRIVER SIDE TANK

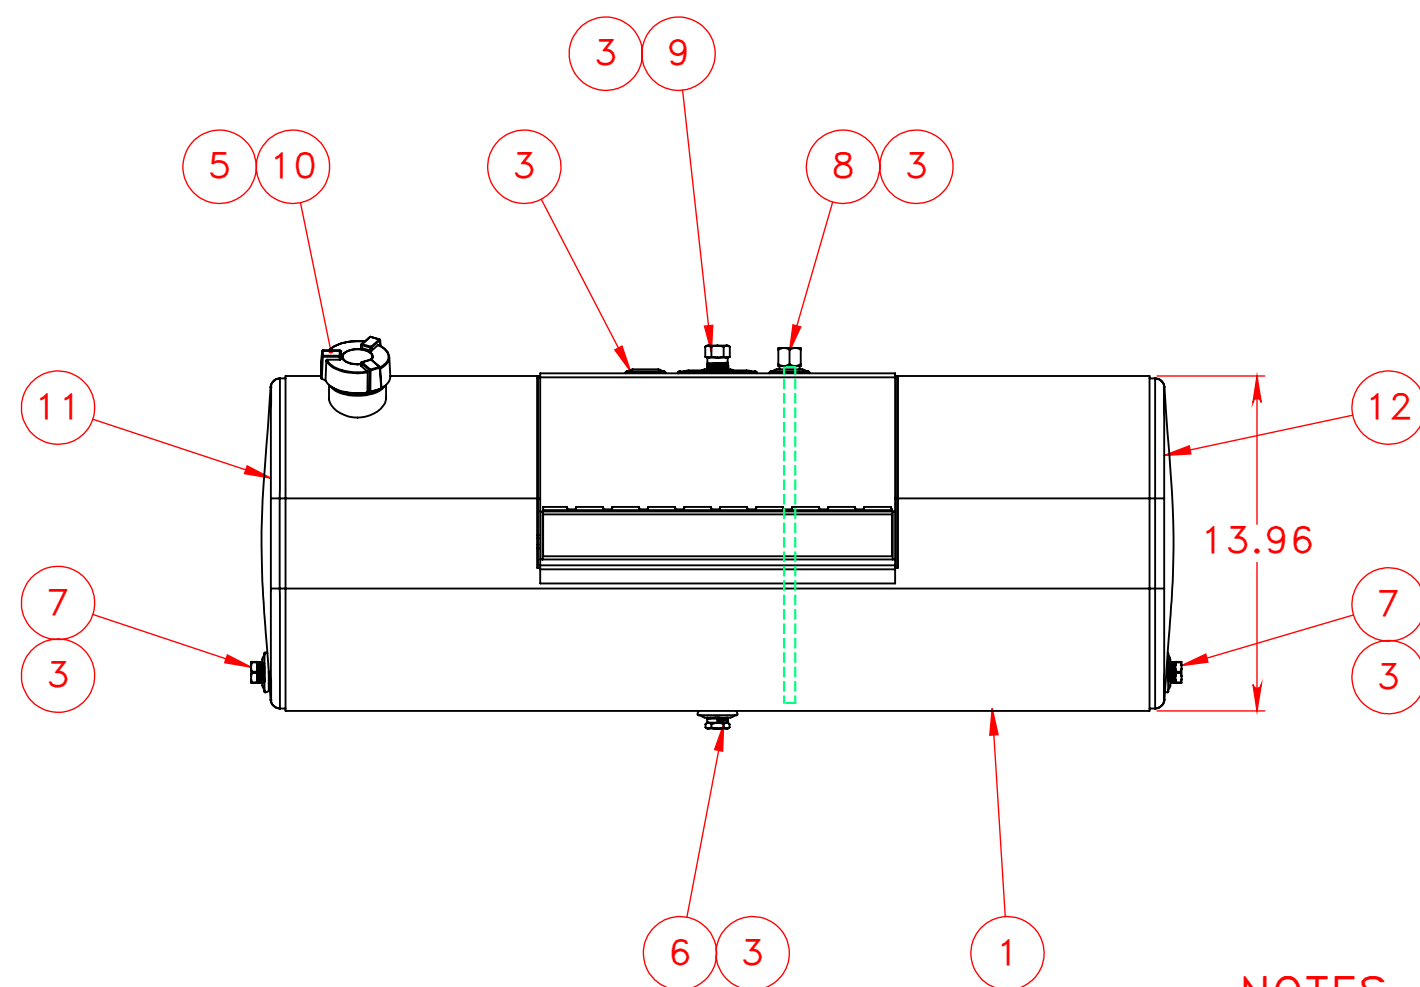

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	116-0664	1/8" Aluminum Wrap	1
2	267-0010	Step Insert	1
3	260-0005	1/2" FNPT Aluminum weld flange	6
4	265-0010	Aluminum Float Riser	1
5	316-0004	2" Aluminum Filler Neck	1
6	458-0100	1/2" NPT Ball Check Drain Plug	1
7	368-0010	1/2" NPT Brass Plug	2
8	490-0014-Z	1/2" NPT Down Tube	1
9	454-0937	1/2" NPT Ball Check Vent	1
10	452-0998	2" Thermal Relief Fuel Cap	1
11	160-0011	14x25 Head	1
12	160-0011	14x25 Head	1

NOTES FOR STANDARD CONSTRUCTION:
 ...MEETS FMCSA REQUIREMENTS.
 ...PRESSURE TESTED @ 5psi
 ...INTERIOR FREE OF FOREIGN MATTER.
 ...FILLER CAP, DRAIN PLUG & VENT PROVIDED.
 ...REPLACEABLE DRAW TUBE
 ...ALUMINUM CONSTRUCTION:
 5052-H32 ALUMINUM, BRIGHT FINISH
 HEADS ARE 0.100" & SHELL IS 0.125"
 ...ALL OPENINGS PLUGGED PRIOR TO SHIPPING

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PROPOWER MFG. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PROPOWER MFG. INC. IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED:	DRAWN	NAME A.B	DATE 05/22/15	PROPOWER MFG. INC. WINDSOR, ONTARIO, CANADA Ph: 519-737-1197 Fax: 519-737-1918 TOLL FREE 1-877-741-2365 Web: metalanks.com TITLE: FD-L14-25RFAS38-A 50usq DIESEL FUEL TANK	
	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± 1/16 ANGULAR: MACH± 1° BEND ± 1° TWO PLACE DECIMAL ± .06 THREE PLACE DECIMAL ± .031	CHECKED				
		ENG APPR.				
		MFG APPR.				
		Q.A.				
	INTERPRET GEOMETRIC TOLERANCING PER:					
	MATERIAL	ALUMINUM				
	FINISH					
	DO NOT SCALE DRAWING					
		THIRD ANGLE PROJECTION				