

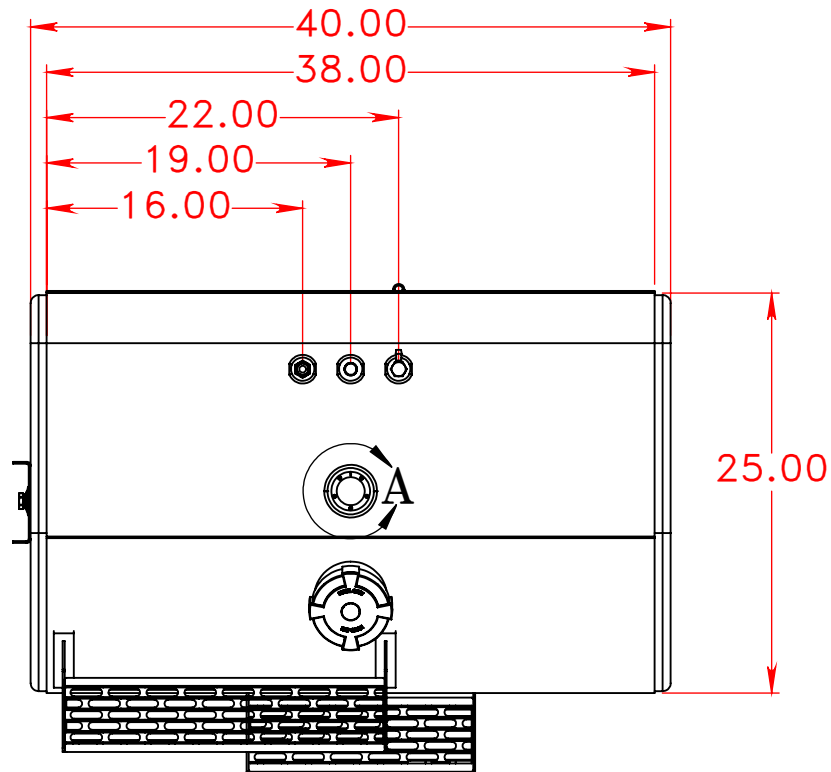
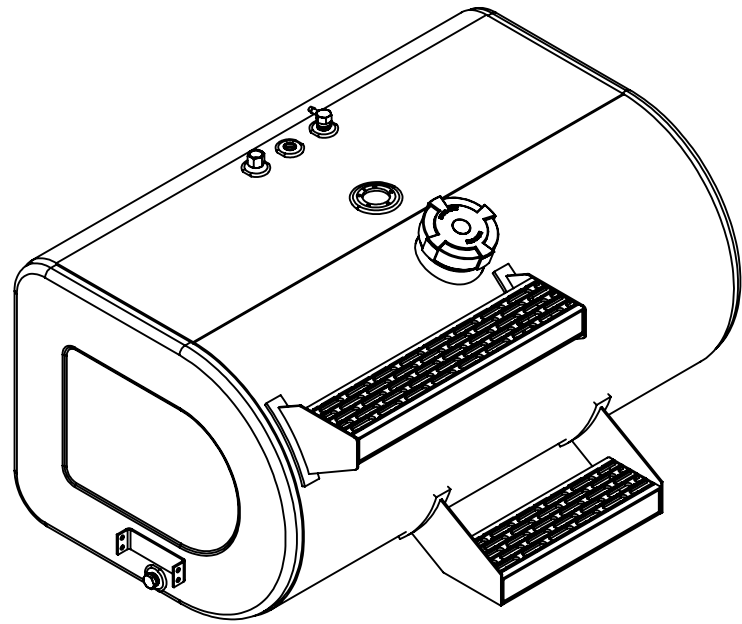




ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	116-0001	1/8" Auminum Sheet	1
2	490-2001	Down Tube Support	1
3	260-0005	1/2" FNPT Aluminum weld flange	5
4	265-0010	Aluminum Float Riser	1
5	490-0020-Z	1/2" NPT Down Tube	1
6	454-0937	1/2" NPT Ball Check Vent	1
7	458-0100	1/2" NPT Ball Check Drain Plug	1
8	316-0024	4" Filler Neck	1
9	452-1015	4" Pressure Relief Fuel Cap	1
10	266-0002	CrossoverSupporBkt	1
11	160-0040	20x25 D Head	1
12	368-0010	1/2" NPT Brass Plug	1
13	266-0005	BktVentHoseClip	1
14	219-0001	Step	1
15	219-0001	Step	1
16	160-0040	20x25 D Head	1


NOTES FOR STANDARD CONSTRUCTION:
...MEETS FMCSA REQUIREMENTS.
...PRESSURE TESTED @ 5psi PER FMCSA.
...INTERIOR FREE OF FOREIGN MATTER.
...FILLER CAP, DRAIN & VENT PROVIDED.
...REPLACEABLE DRAW/RETURN TUBES.
...FULL BAFFLE(S) WHERE SHOWN.
...ALUMINUM CONSTRUCTION:
5052-H32 ALUMINUM, BRIGHT FINISH
HEADS ARE .100" & SHELL IS .125".
...ALL OPENINGS PLUGGED PRIOR TO SHIPPING

STRAP SIZE 40" LOOP TO LOOP 2 T

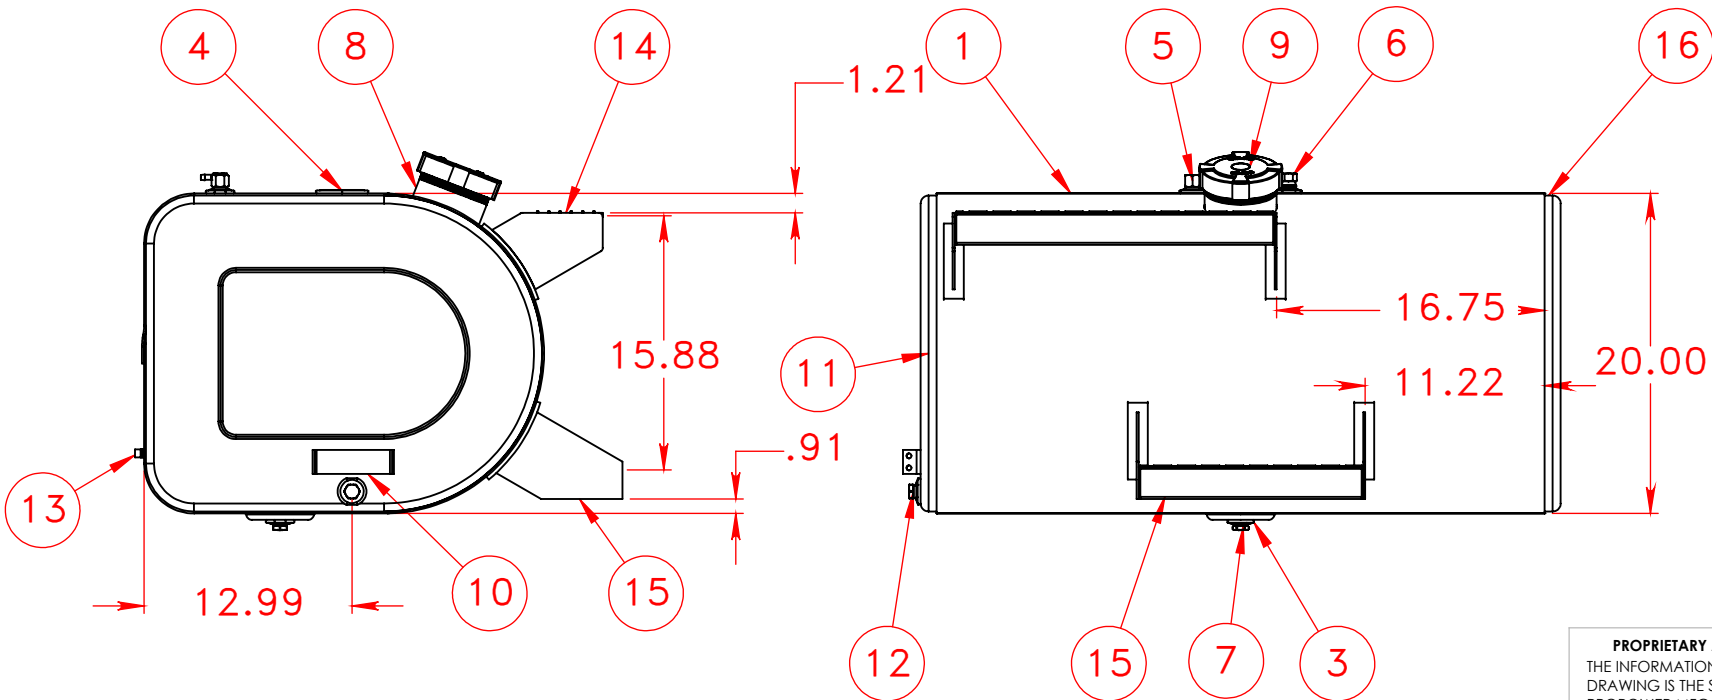

DETAIL A
SCALE 1 : 4

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
PROPOWER MFG. INC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
PROPOWER MFG. INC. IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME		DATE	
DIMENSIONS ARE IN INCHES		DRAWN		A.B 07/17/08	
TOLERANCES:		CHECKED			
FRACTIONAL ± 1/16		ENG APPR.			
ANGULAR: MACH ± 1° BEND ± 1°		MFG APPR.			
TWO PLACE DECIMAL ± .06		Q.A.			
THREE PLACE DECIMAL ± .031		COMMENTS:			
INTERPRET GEOMETRIC TOLERANCING PER:					
MATERIAL					
ALUMINUM					
FINISH					
DO NOT SCALE DRAWING		THIRD ANGLE PROJECTION 			
PROPOWER MFG. INC. WINDSOR, ONTARIO, CANADA Ph; 519-737-1197 Fax; 519-737-1918 TOLL FREE 1-877-741-2365 Web; metaltanks.com					
TITLE:		FD-L20-25DFA2S40 78 US GROSS GALLONS 75 USEBLE GALLONS DIESEL FUEL TANK			
SIZE		DWG. NO.			REV
B		8658-1			
SCALE: 1:12		WEIGHT: 65 lbs		SHEET 1 OF 2	