

8 7 6 5 4 3 2 1

F


E

D


C

B


A

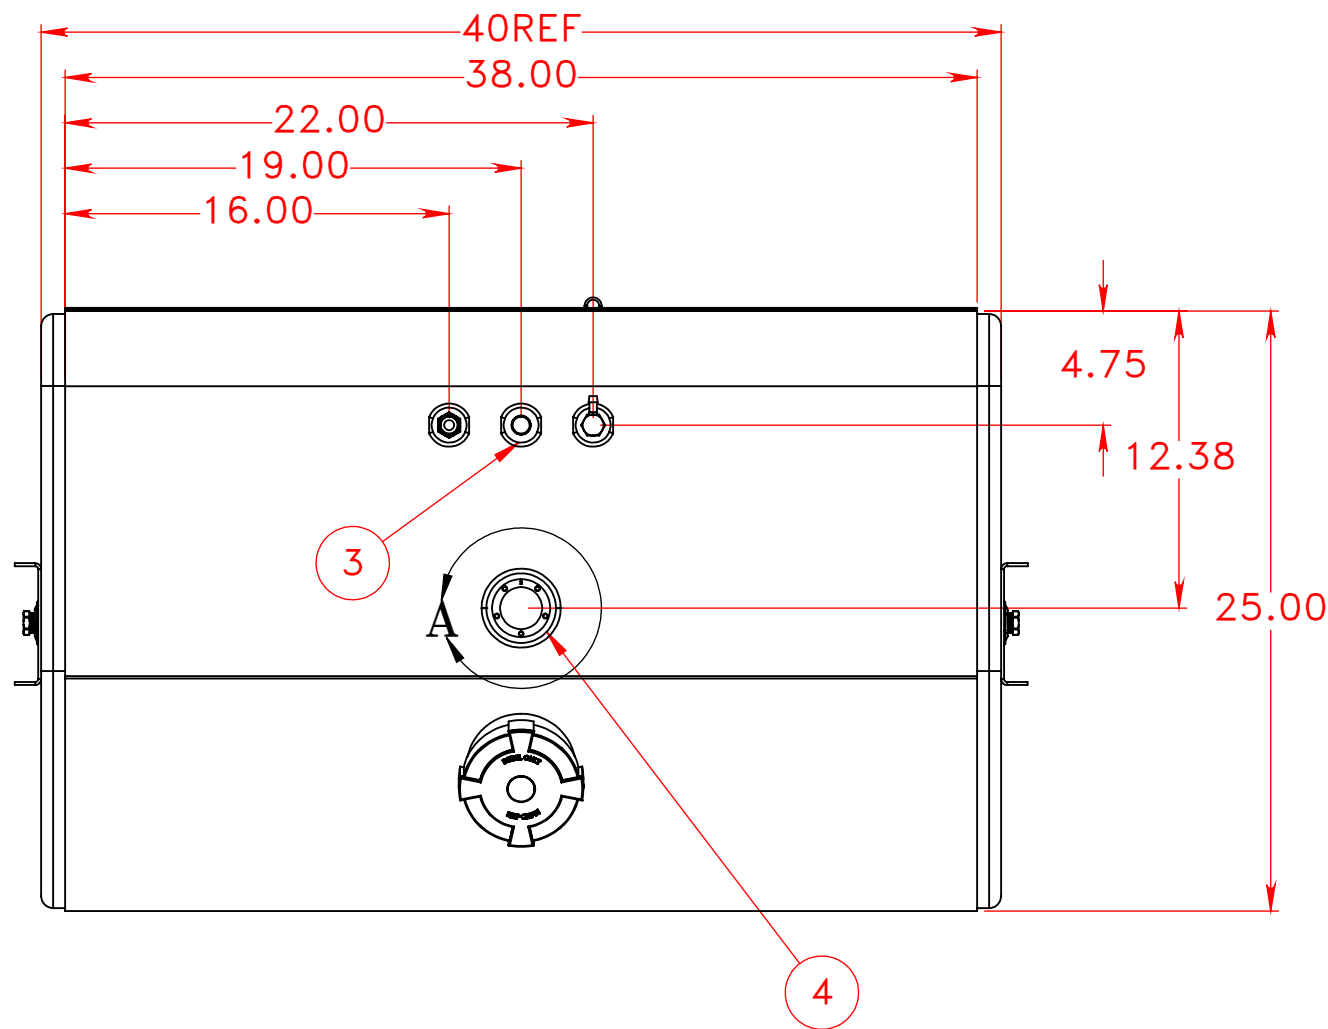

NOTES FOR STANDARD CONSTRUCTION:
...MEETS FMCSA REQUIREMENTS.
...PRESSURE TESTED @ 5psi
...INTERIOR FREE OF FOREIGN MATTER.
...FILLER CAP, DRAIN PLUG & VENT PROVIDED.
...REPLACEABLE DRAW TUBE
...ALUMINUM CONSTRUCTION:
5052-H32 ALUMINUM, BRIGHT FINISH
HEADS ARE 0.100" & SHELL IS 0.125"
...ALL OPENINGS PLUGGED PRIOR TO SHIPPING

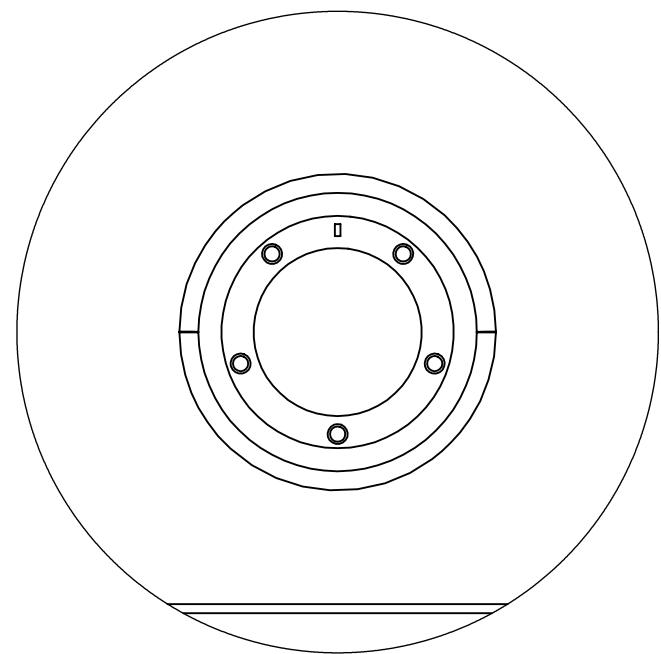

DETAIL A
SCALE 1 : 2

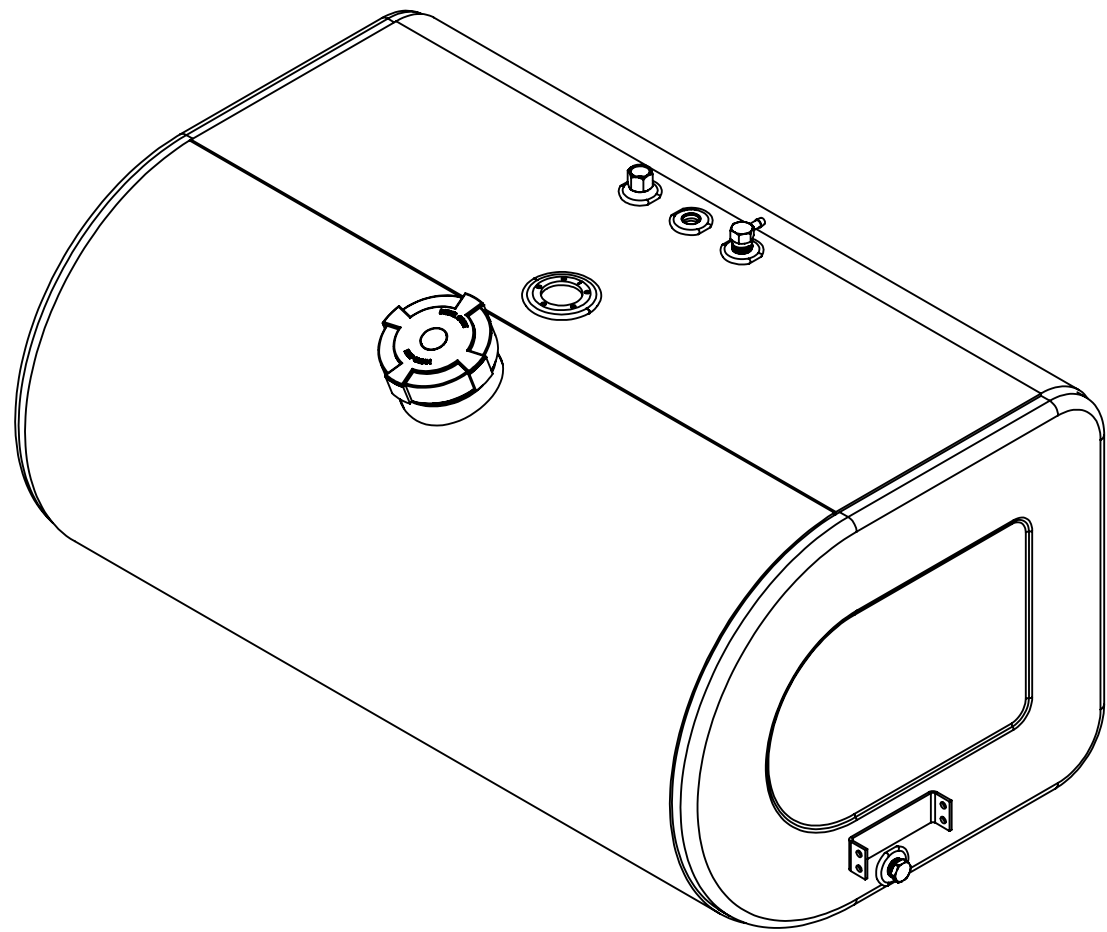

F



E

D

C

B

A

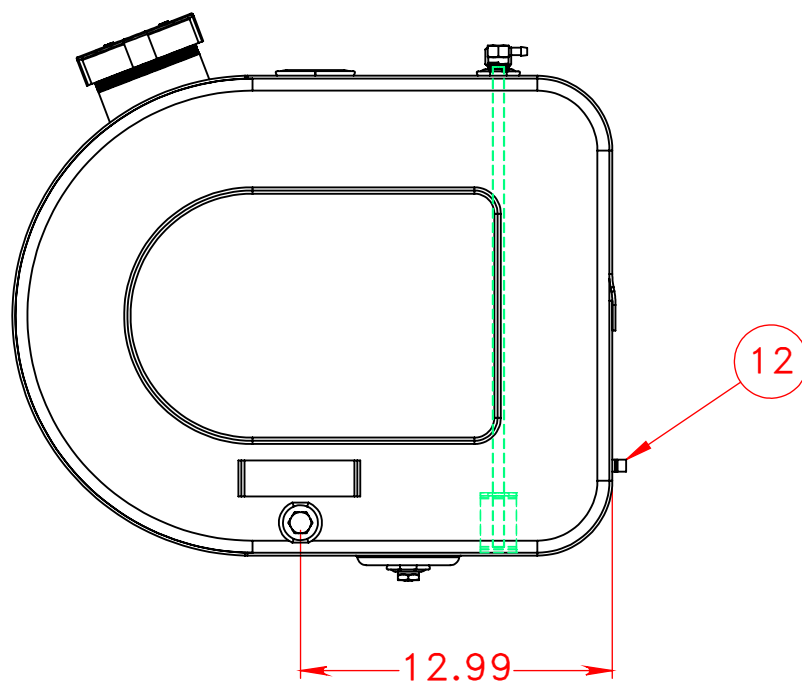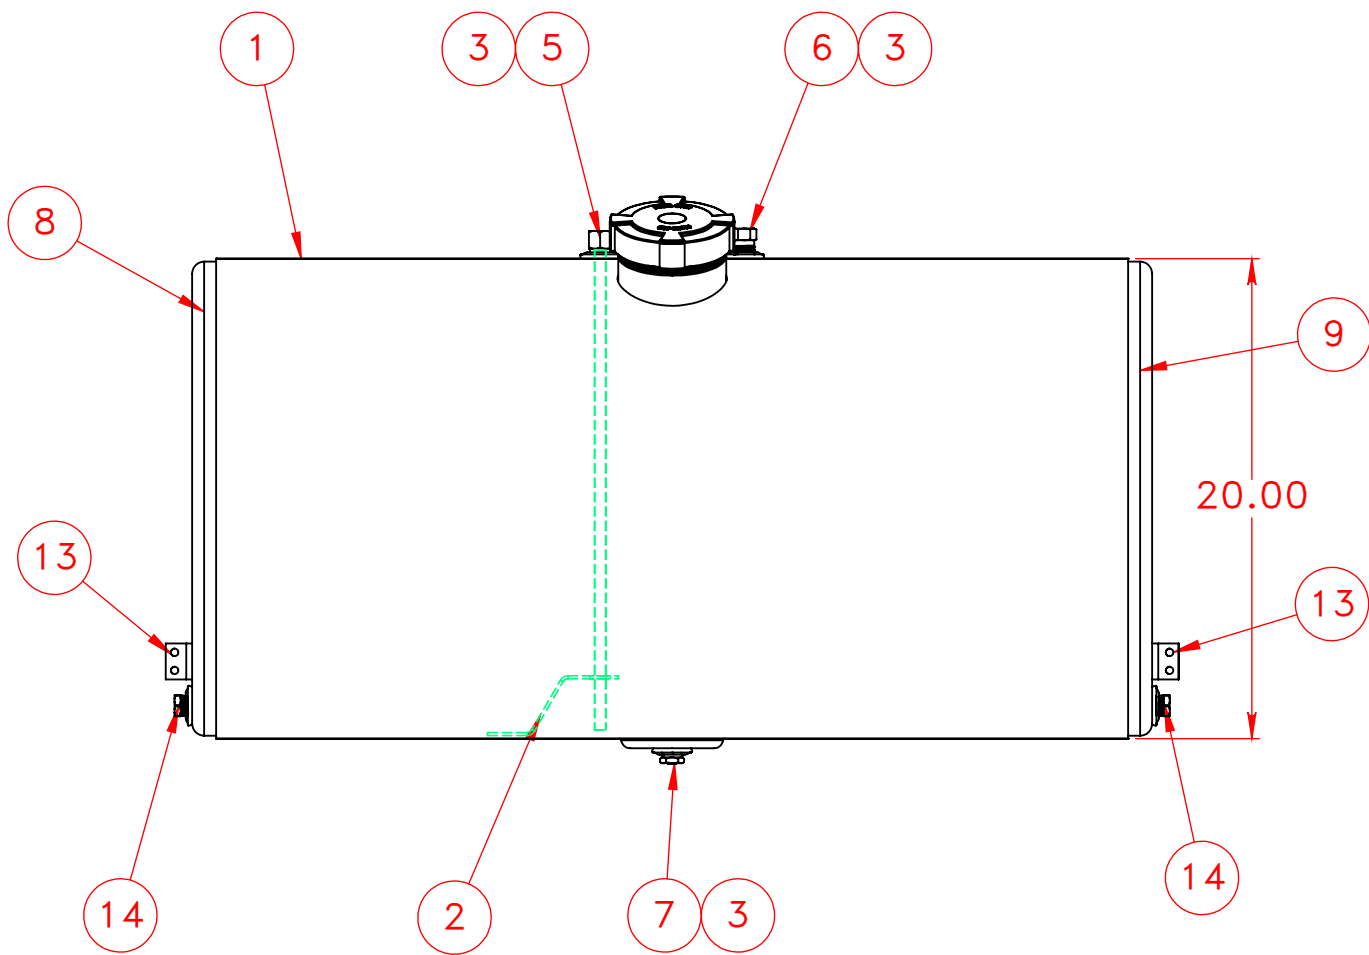

ITEM NO.	PART NUMBER	DESCRIPTION	QTY
1	116-0001	1/8" Auminum Sheet	1
2	490-3001	Down Tube Support	1
3	260-0005	1/2" FNPT Aluminum weld flange	6
4	265-0010	Aluminum Float Riser	1
5	490-0020-Z	1/2" NPT Down Tube	1
6	454-0937	1/2" NPT Ball Check Vent	1
7	458-0100	1/2" NPT Ball Check Drain Plug	1
8	160-0040	20x25 D Head	1
9	160-0067	20x25 D Head With Crossover	1
10	316-0024	4" Filler Neck	1
11	452-1015	4" Pressure Relief Fuel Cap	1
12	266-0005	BktVentHoseClip	1
13	266-0002	CrossoverSupporBkt	2
14	368-0010	1/2" NPT Brass Plug	2

STRAP SIZE 40" LOOP TO LOOP 2 T

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
PROPOWER MFG. INC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
PROPOWER MFG. INC. IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	DRAWN	NAME	DATE
DIMENSIONS ARE IN INCHES	CHECKED	A.B	01/27/12
TOLERANCES:	ENG APPR.		
FRACTIONAL ± 1/16	MFG APPR.		
ANGULAR: MACH ± 1° BEND ± 1°	Q.A.		
TWO PLACE DECIMAL ± .06	COMMENTS:		
THREE PLACE DECIMAL ± .031			
INTERPRET GEOMETRIC TOLERANCING PER:			
MATERIAL	ALUMINUM		
FINISH			
DO NOT SCALE DRAWING	THIRD ANGLE PROJECTION		

PROPOWER MFG. INC. WINDSOR, ONTARIO, CANADA Ph: 519-737-1197 Fax: 519-737-1918 TOLL FREE 1-877-741-2365 Web: metaltanks.com			TITLE: FD-20-25DFA40 78 US GROSS GALLONS 75 USEBLE GALLONS DIESEL FUEL TANK	
SIZE	DWG. NO.	REV		
C	13302			
SCALE: 1:8	WEIGHT: 55 LBS	SHEET 1 OF 2		