


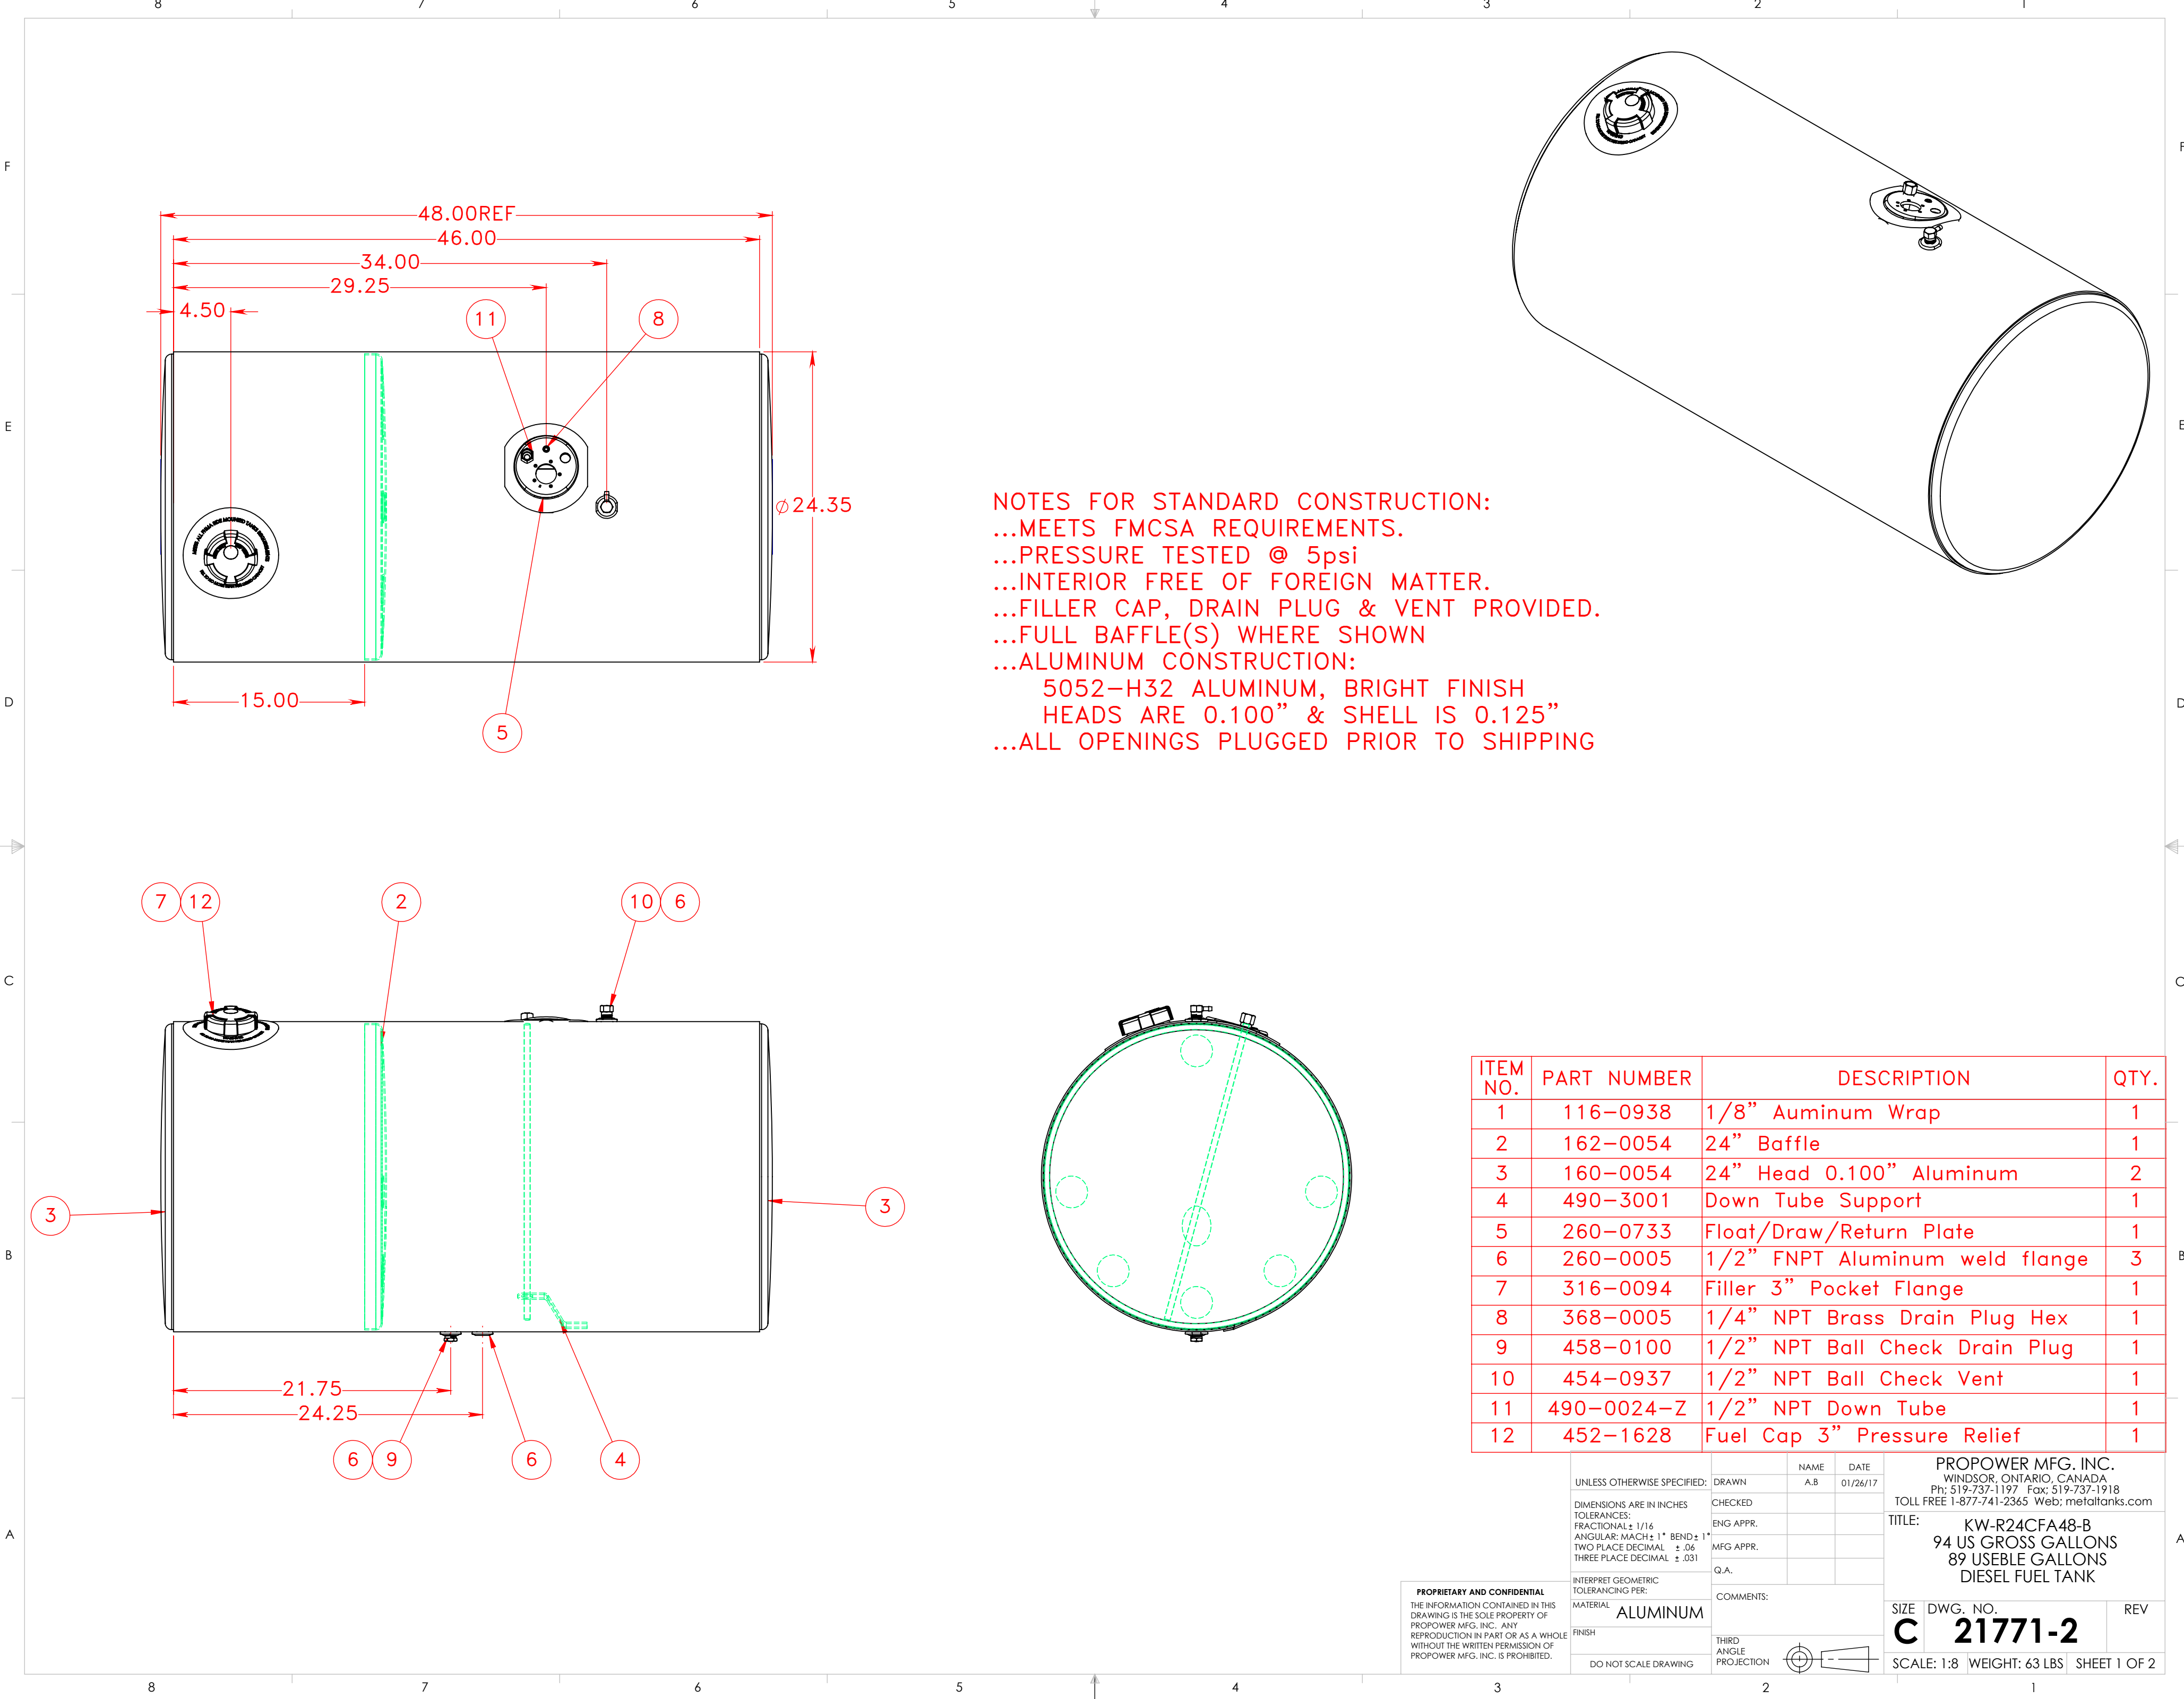

NOTES FOR STANDARD CONSTRUCTION:
...MEETS FMCSA REQUIREMENTS.
...PRESSURE TESTED @ 5psi
...INTERIOR FREE OF FOREIGN MATTER.
...FILLER CAP, DRAIN PLUG & VENT PROVIDED.
...FULL BAFFLE(S) WHERE SHOWN
...ALUMINUM CONSTRUCTION:
5052-H32 ALUMINUM, BRIGHT FINISH
HEADS ARE 0.100" & SHELL IS 0.125"
...ALL OPENINGS PLUGGED PRIOR TO SHIPPING

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	116-0938	1/8" Auminum Wrap	1
2	162-0054	24" Baffle	1
3	160-0054	24" Head 0.100" Aluminum	2
4	490-3001	Down Tube Support	1
5	260-0733	Float/Draw/Return Plate	1
6	260-0005	1/2" FNPT Aluminum weld flange	3
7	316-0094	Filler 3" Pocket Flange	1
8	368-0005	1/4" NPT Brass Drain Plug Hex	1
9	458-0100	1/2" NPT Ball Check Drain Plug	1
10	454-0937	1/2" NPT Ball Check Vent	1
11	490-0024-Z	1/2" NPT Down Tube	1
12	452-1628	Fuel Cap 3" Pressure Relief	1

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PROPOWER MFG. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PROPOWER MFG. INC. IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED:	DRAWN	NAME	DATE	PROPOWER MFG. INC. WINDSOR, ONTARIO, CANADA Ph: 519-737-1197 Fax: 519-737-1918 TOLL FREE 1-877-741-2365 Web: metaltanks.com
	DIMENSIONS ARE IN INCHES	CHECKED	A.B	01/26/17	
	TOLERANCES:	ENG APPR.			
	ANGULAR: MACH± 1° BEND± 1°	MFG APPR.			
	TWO PLACE DECIMAL ± .06				
THREE PLACE DECIMAL ± .031					
INTERPRET GEOMETRIC TOLERANCING PER:					TITLE: KW-R24CFA48-B 94 US GROSS GALLONS 89 USEBLE GALLONS DIESEL FUEL TANK
MATERIAL	COMMENTS:				
FINISH	THIRD ANGLE PROJECTION				
DO NOT SCALE DRAWING					
SCALE: 1:8 WEIGHT: 63 LBS SHEET 1 OF 2					