

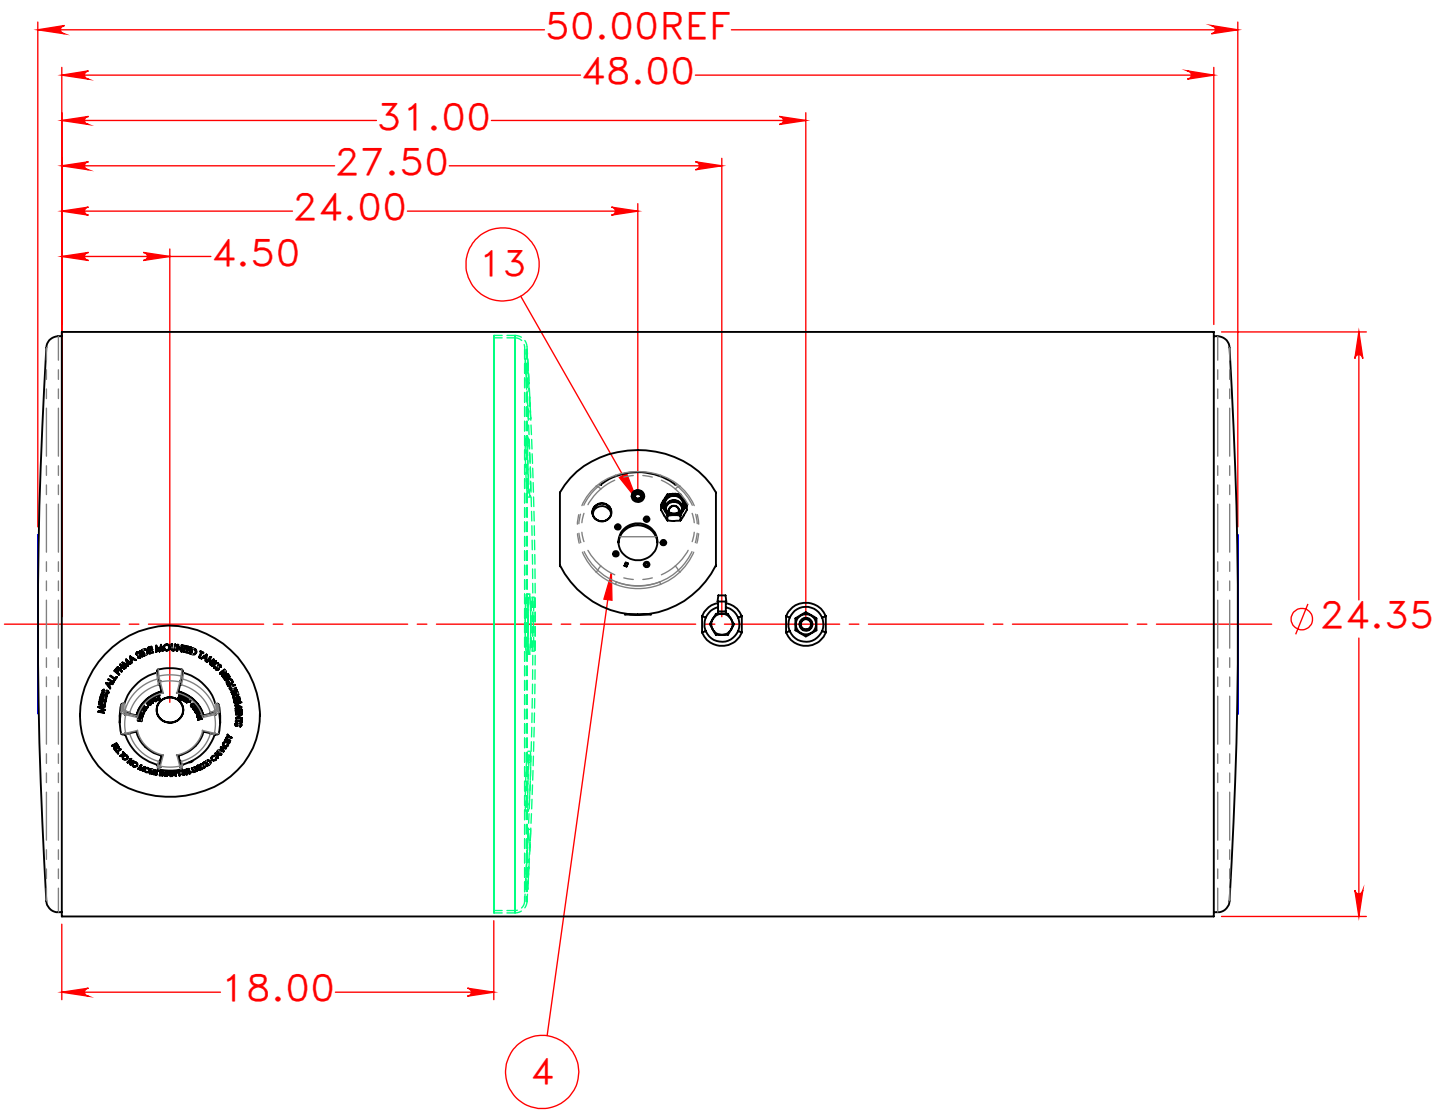
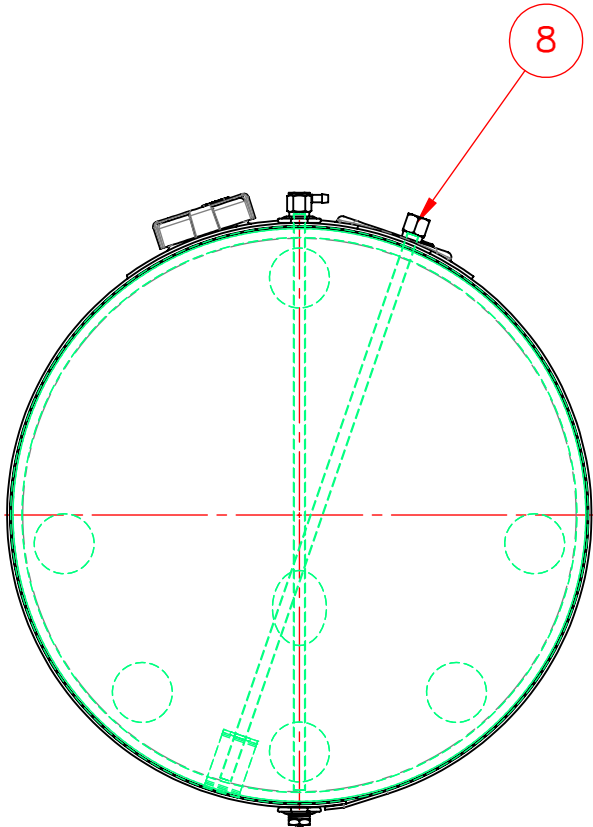


PASSENGER SIDE TANK

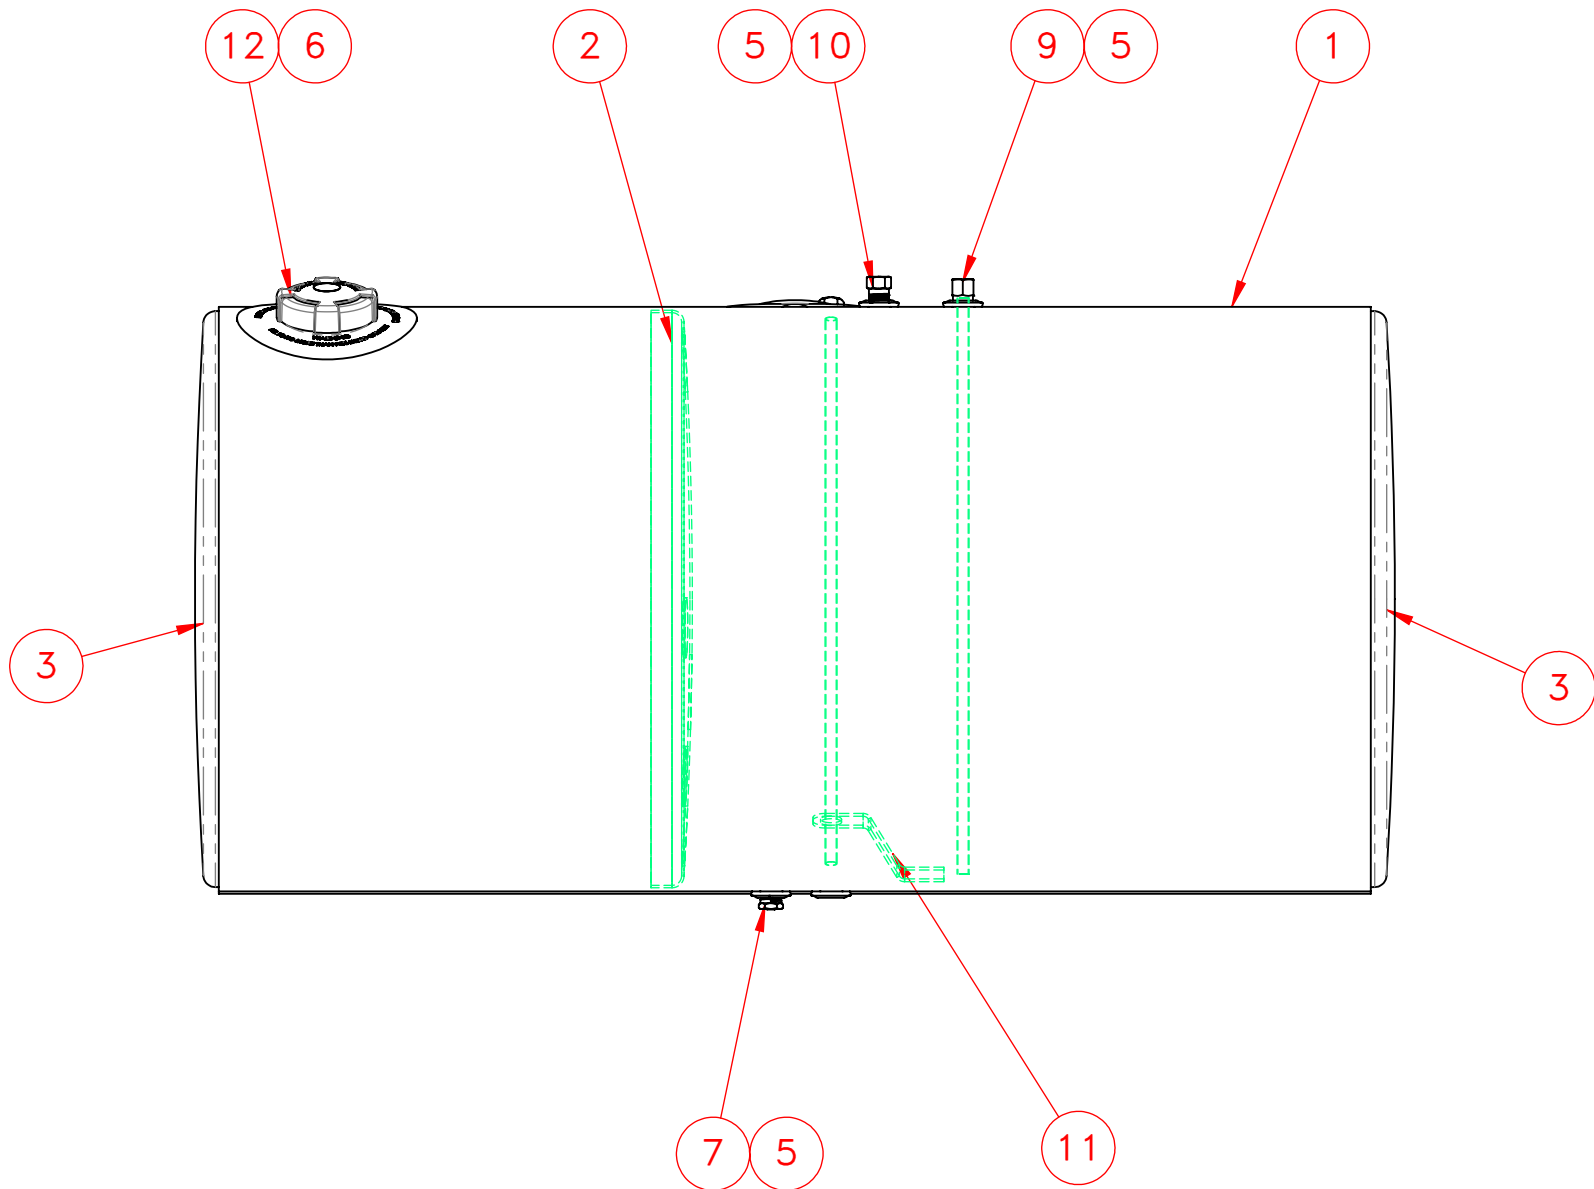

NOTES FOR STANDARD CONSTRUCTION:
...MEETS FMCSA REQUIREMENTS.
...PRESSURE TESTED @ 5psi
...INTERIOR FREE OF FOREIGN MATTER.
...FILLER CAP, DRAIN PLUG & VENT PROVIDED.
...ALUMINUM CONSTRUCTION:
5052-H32 ALUMINUM, BRIGHT FINISH
HEADS ARE 0.100" & SHELL IS 0.125"
...ALL OPENINGS PLUGGED PRIOR TO SHIPPING

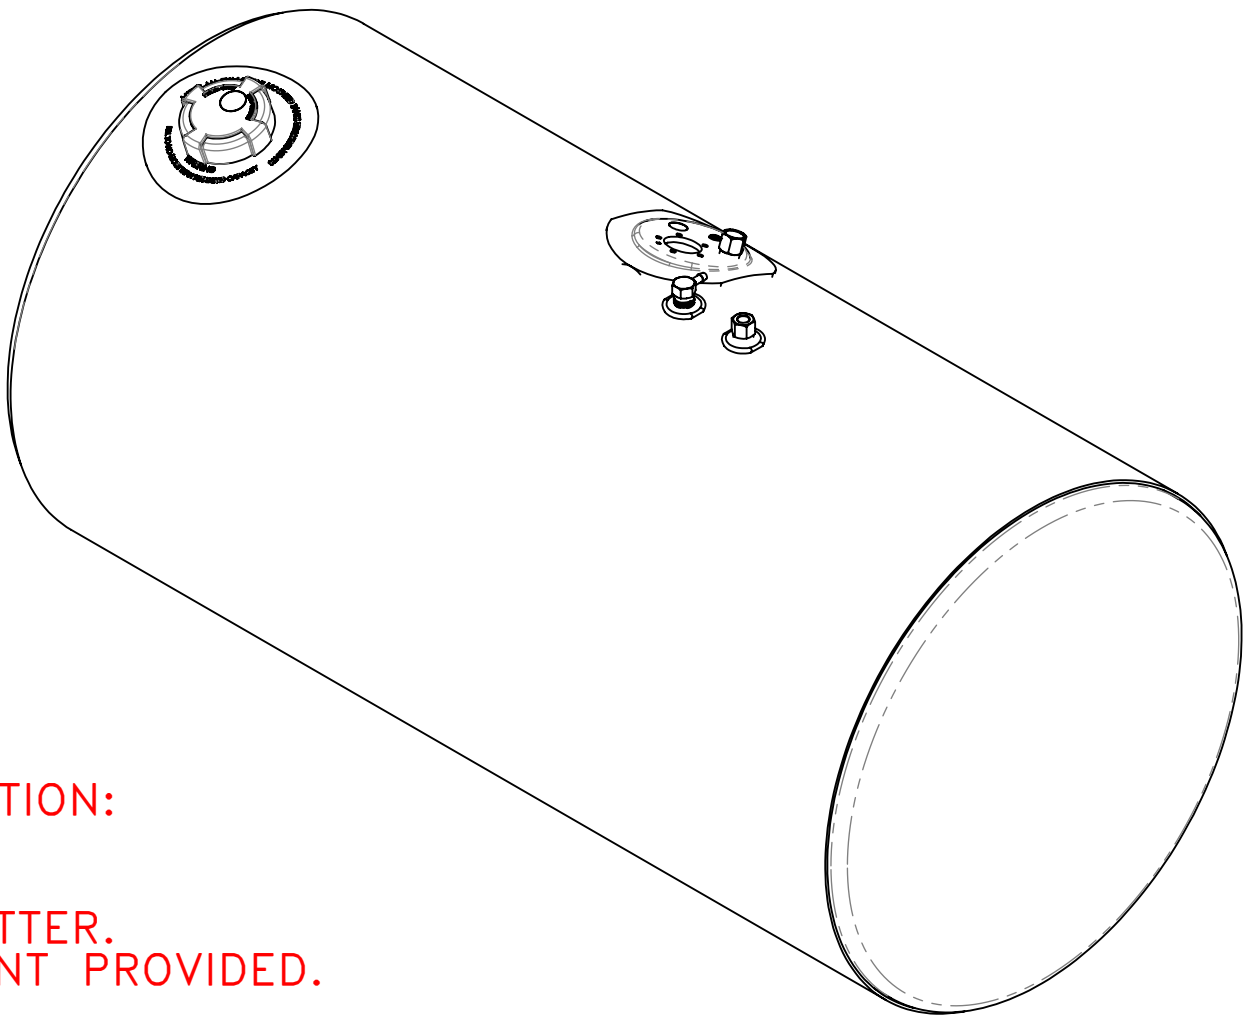

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	116-0483	1/8" Auminum Wrap	1
2	162-0054	24" Baffle	1
3	160-0054	24" Head 0.100" Aluminum	2
4	260-0733	Float/Draw/Return Plate	1
5	260-0005	1/2" FNPT Aluminum weld flange	4
6	316-0094	Filler 3" Pocket Flange	1
7	458-0100	1/2" NPT Ball Check Drain Plug	1
8	490-0024-Z	1/2" NPT Down Tube	1
9	492-0024-Z	1/4" FNPT X 1/2" NPT 1/2" Down Tube	1
10	454-0937	1/2" NPT Ball Check Vent	1
11	490-3001	Down Tube Support	1
12	452-1628	Fuel Cap 3" Pressure Relief	1
13	368-0005	1/4" NPT Brass Drain Plug Hex	1

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PROPOWER MFG. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PROPOWER MFG. INC. IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED:	DRAWN	NAME	DATE	PROPOWER MFG. INC. WINDSOR, ONTARIO, CANADA Ph: 519-737-1197 Fax: 519-737-1918 TOLL FREE 1-877-741-2365 Web: metaltanks.com
	DIMENSIONS ARE IN INCHES	CHECKED	A.B	05/12/14	
	TOLERANCES: FRACTIONAL ± 1/16 ANGULAR: MACH ± 1° BEND ± 1° TWO PLACE DECIMAL ± .06 THREE PLACE DECIMAL ± .031	ENG APPR.			
	INTERPRET GEOMETRIC TOLERANCING PER: MATERIAL	MFG APPR.			
	FINISH	Q.A.			TITLE: KW-R24CFA50 98 US GROSS GALLONS 93 USEBLE GALLONS DIESEL FUEL TANK
	DO NOT SCALE DRAWING	COMMENTS:			
		THIRD ANGLE PROJECTION			
					SIZE DWG. NO. REV
					C 16816
					SCALE: 1:8 WEIGHT: 64 lbs SHEET 1 OF 2